


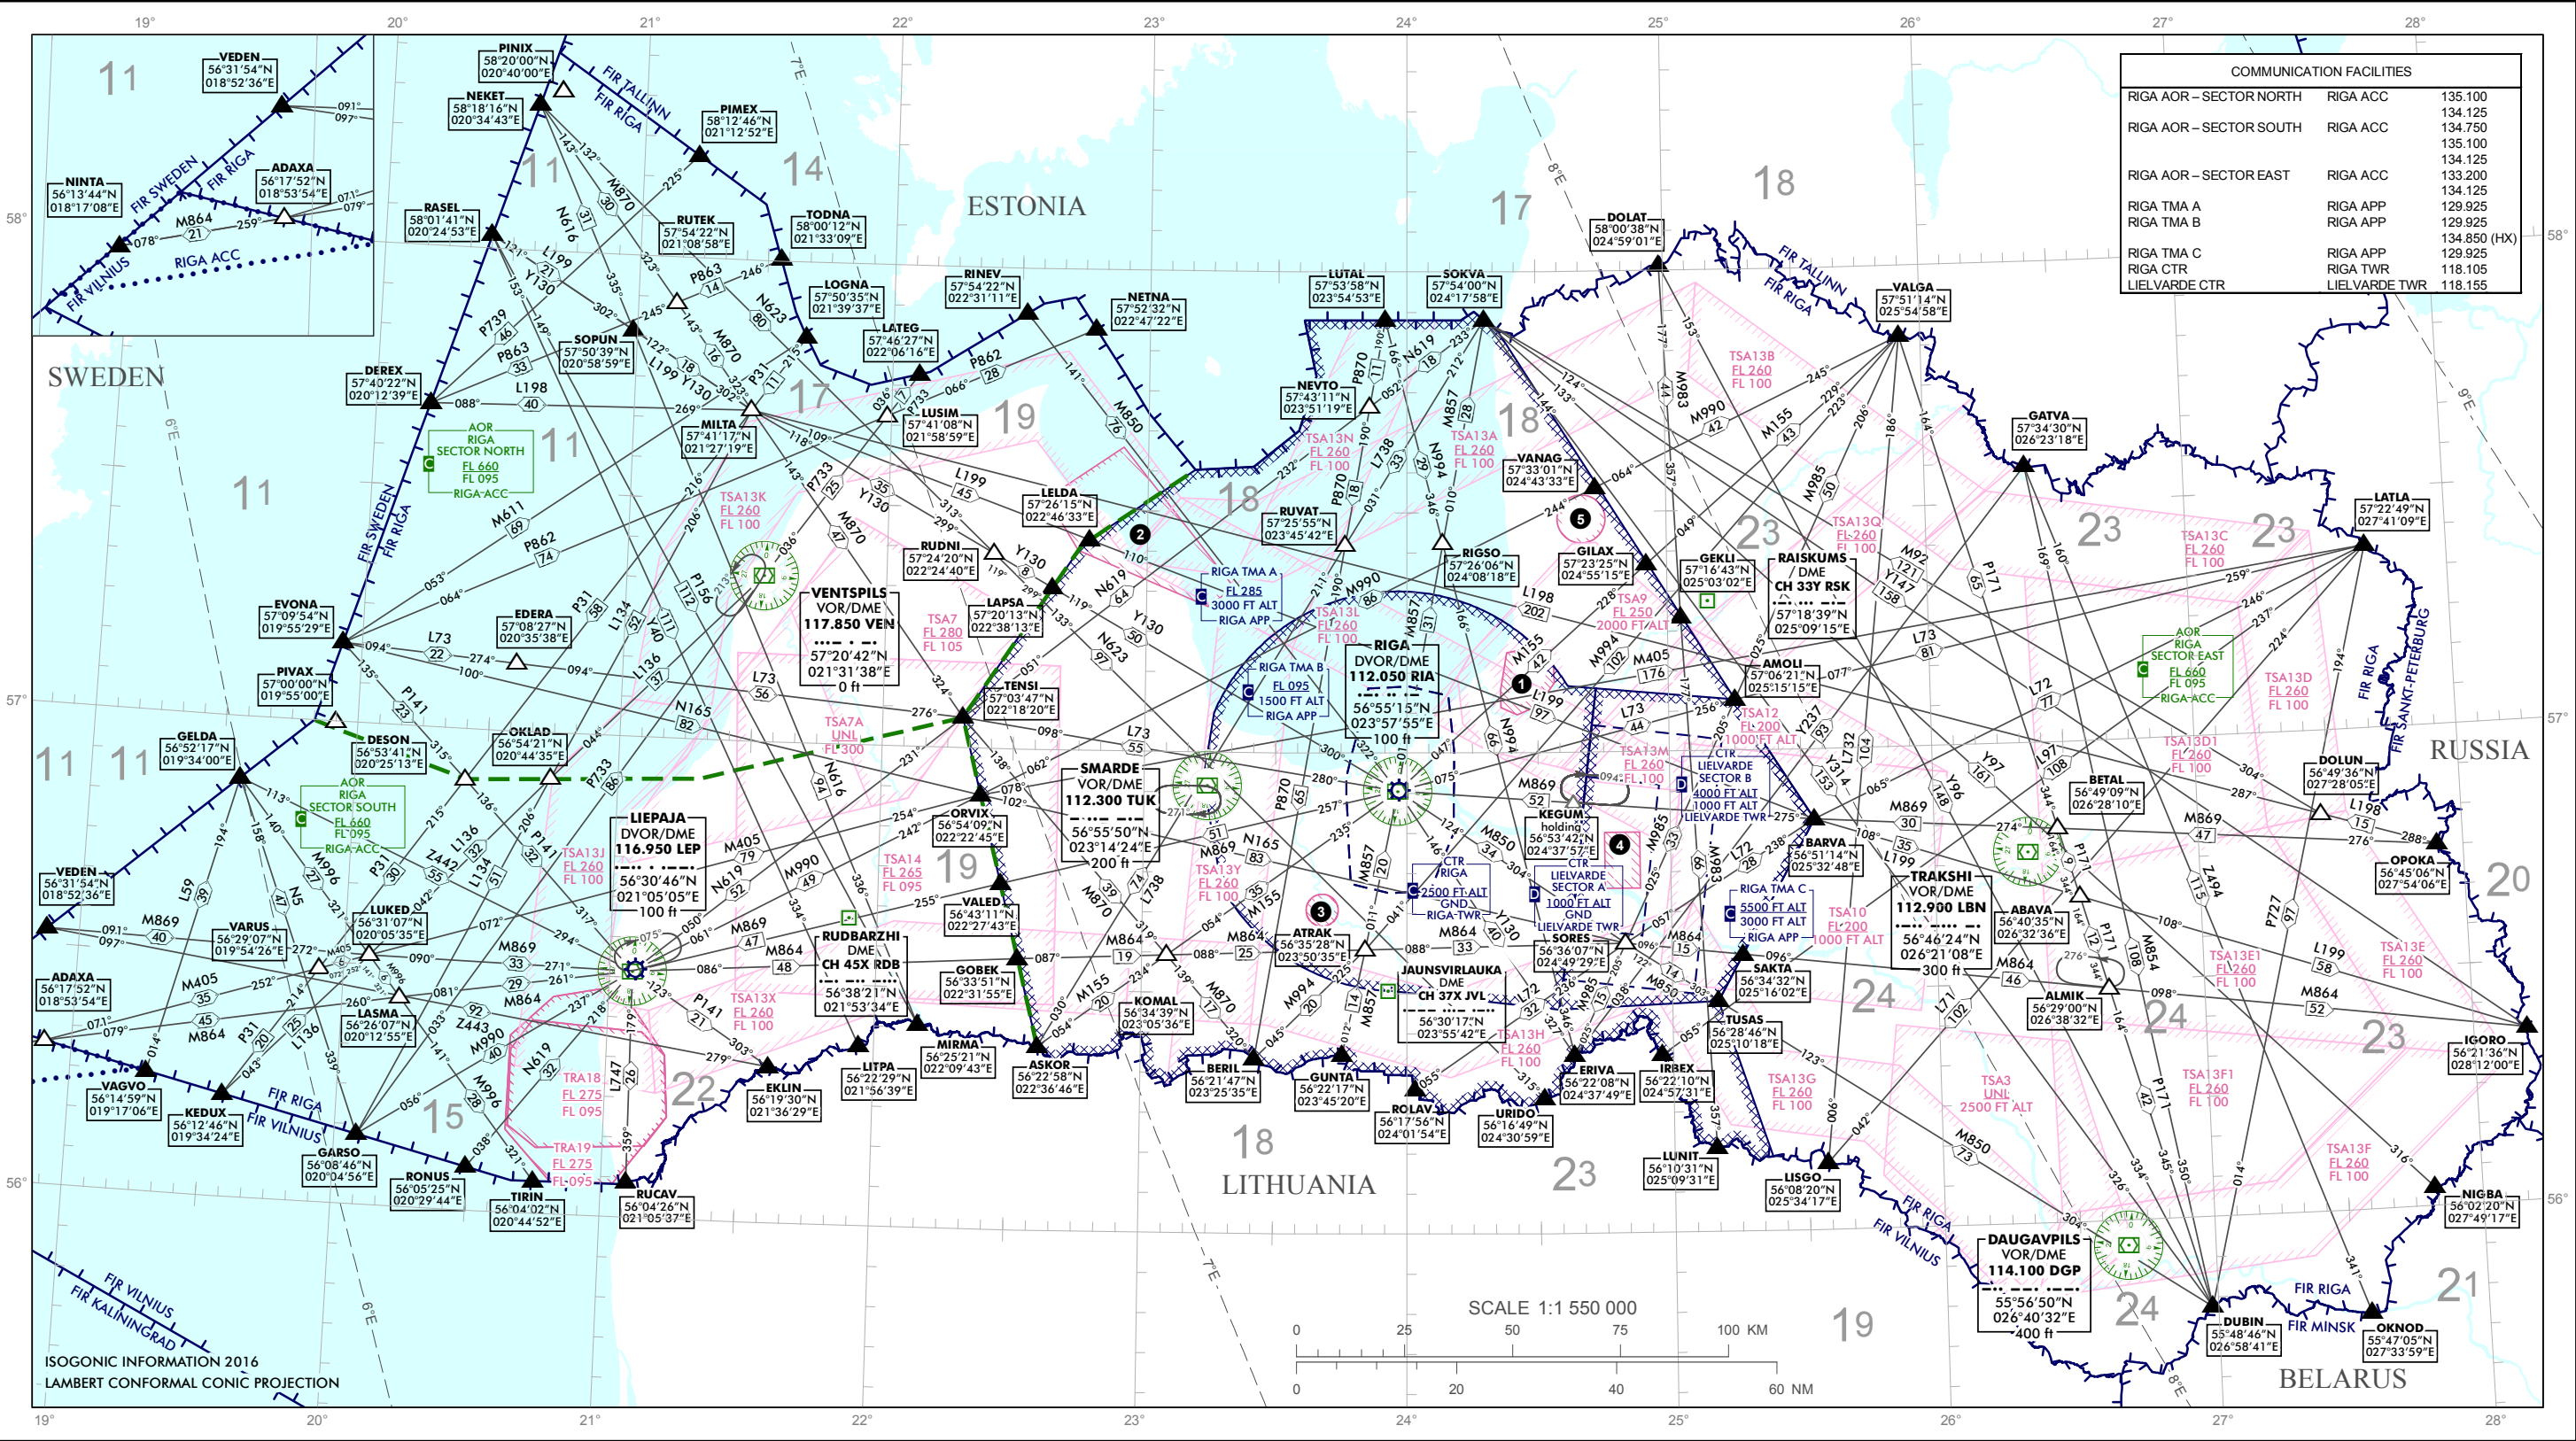

Changes: TSA14 established.

1	R5	FL 250 GND	by NOTAM
2	TRA2	FL 250 3000 FT ALT	Ref. ENR 5.5
3	TRA4	FL 140 GND	Ref. ENR 5.5
4	TRA7	FL 175 GND	Ref. ENR 5.2
5	TRA17	FL 150 GND	Ref. ENR 5.5

ATS airspace classification			
FIR	CTA	TMA	AOR
UNL	Riga	Riga	Riga
FL 660	FL 660	FL 285	UNL
FL 095	FL 095	1500 FT ALT	FL 095
GND	Riga ACC	Riga APP	GND
Riga ACC			Riga ACC

Each 1° quadrilateral contains Area minimum altitude (AMA) which represents the lowest altitude which may be used under instrument meteorological conditions (IMC). The AMA provides a minimum clearance of 1000 FT above all obstacles in the quadrilateral. It is represented in hundreds of feet above mean sea level.

Area minimum altitude (AMA)
Example: 1700 FT - 17
NOTE: All specified AMA values apply Riga FIR (EVRR).

NOTE:
1. Altitudes and elevations are in FT
2. Distances are in NM and tracks are TRUE bearing
3. For RNAV routes - RNAV 5
4. Holdings - ref. ENR 3.6
5. HX - No specific working hours
6. Legend see GEN 2.3 (Chart Symbols)
7. WPT PINIX, PIVAX for State ACFT only

INTENTIONALLY LEFT BLANK