


STANDARD DEPARTURE CHART -
INSTRUMENT (SID) - ICAOTRANSITION ALTITUDE
5000 FTAPP 129.925
134.850 (HX)
TWR 118.105
ATIS 120.180RIGA (EVRA)
RNAV (GNSS or DME/DME) RWY 36
(direction WEST "J" type)

MAX IAS 250 kt BELOW FL 100

ASKOR 1J, BERIL 1J, LAPSA 1J, TENSI 1J, VALED 1J

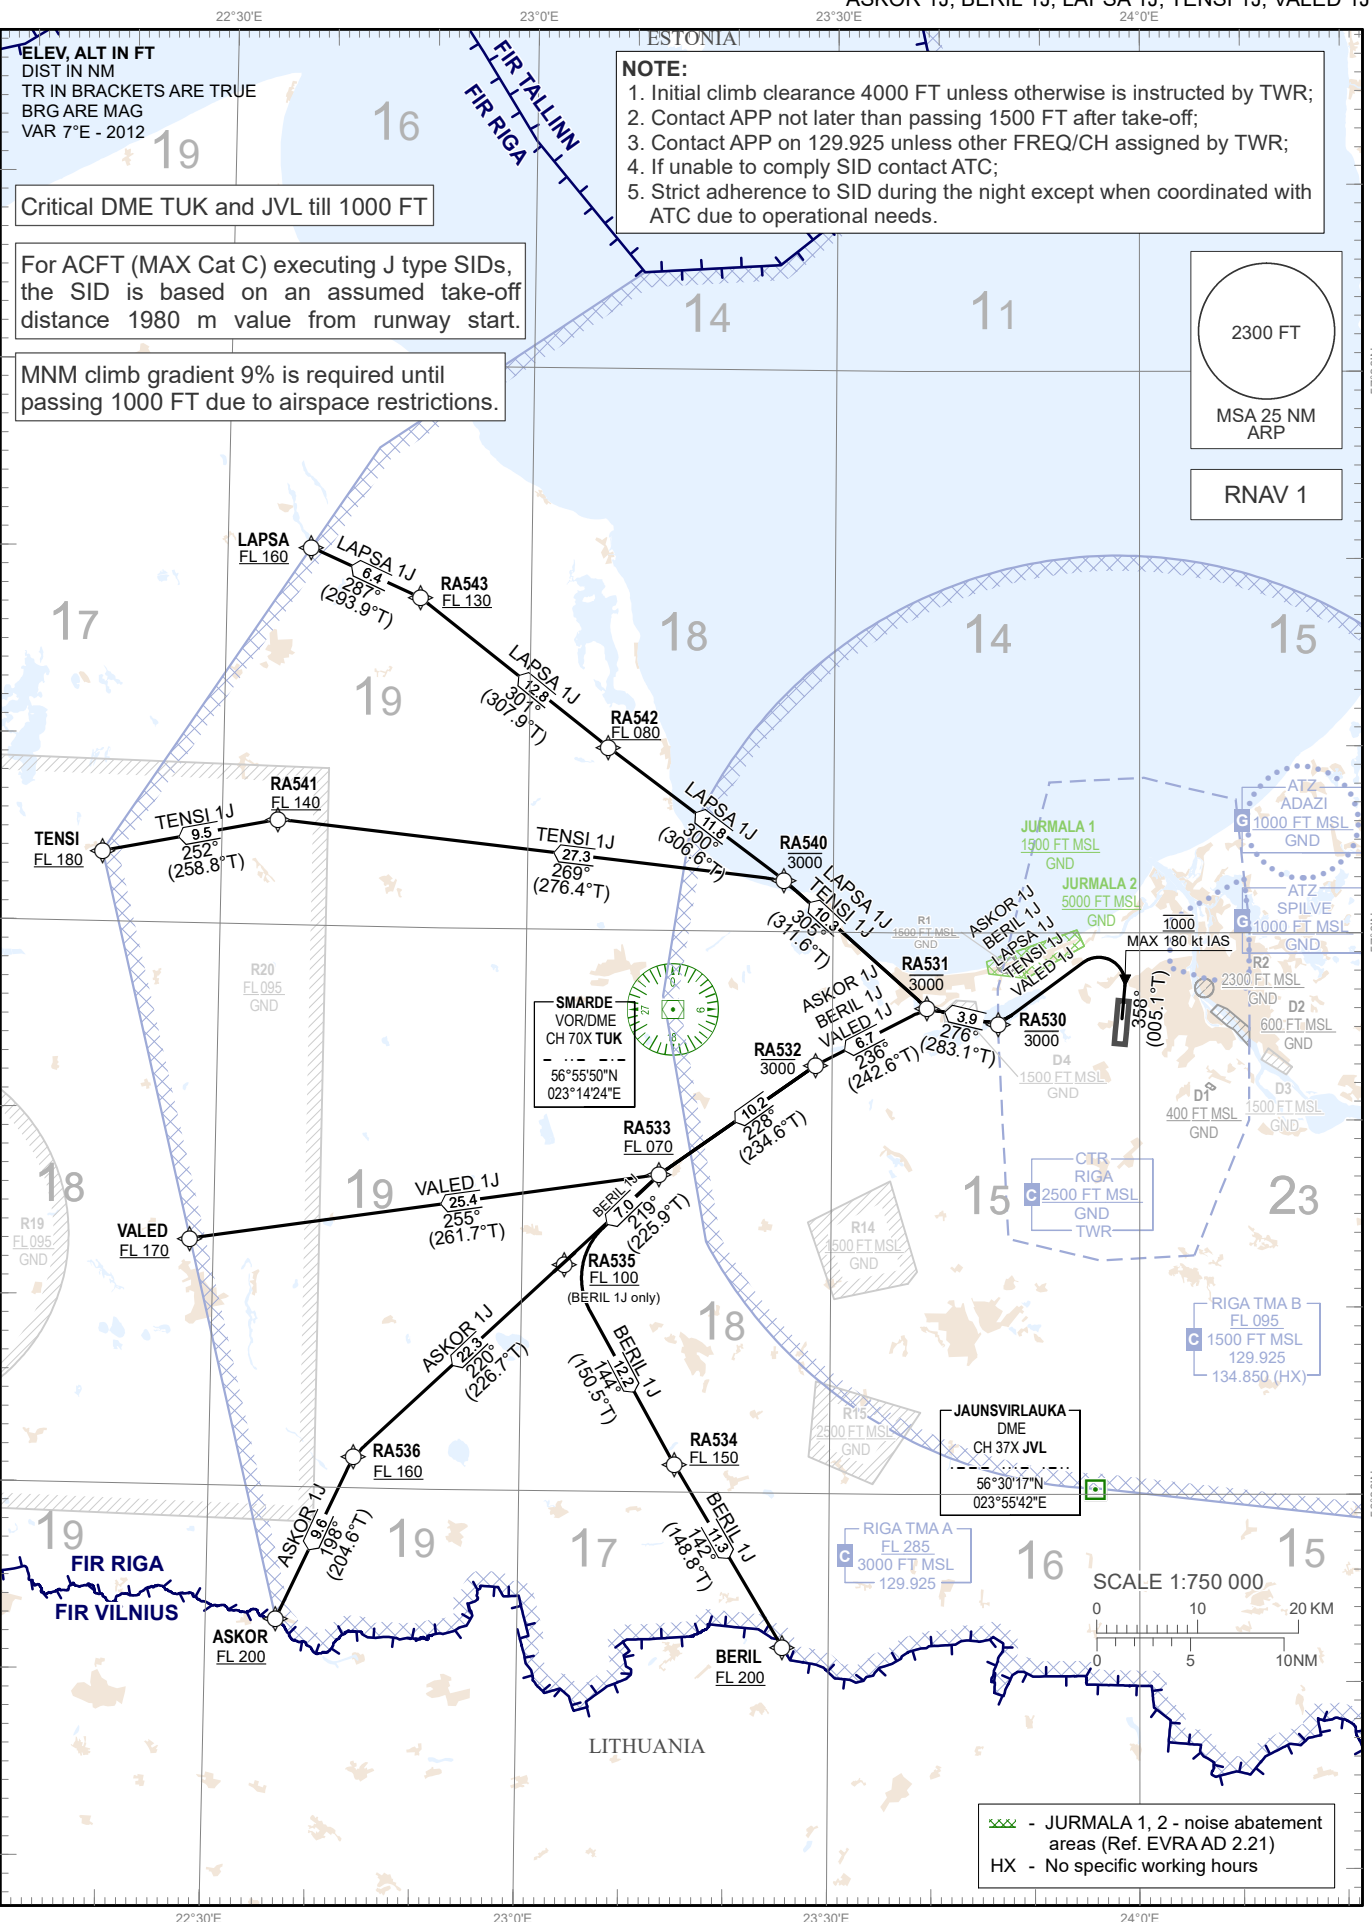

RNAV PROCEDURE CODING TABLES

ASKOR 1J

	Path Descriptor	Waypoint Identifier	Fly - over	Course °M(°T)	Magnetic Variation(°)	Distance NM	Turn Direction	Altitude FT	Speed KT	Navigation Specification
10	CA	-	-	358(005.1)	+7.0		-	1000	-180	RNAV 1
20	DF	RA530	-	-	+7.0		L	-3000	-230	RNAV 1
30	TF	RA531	-	276(283.1)	+7.0	3.9	R	-3000		RNAV 1
40	TF	RA532	-	236(242.6)	+7.0	6.7	L	-3000		RNAV 1
50	TF	RA533	-	228(234.6)	+7.0	10.2	L	+070 FL		RNAV 1
60	TF	RA536	-	220(226.7)	+7.0	22.3	L	+160 FL		RNAV 1
70	TF	ASKOR	-	198(204.6)	+7.0	9.6	L	+200 FL		RNAV 1

BERIL 1J

Serial Number	Path Descriptor	Waypoint Identifier	Fly - over	Course °M(°T)	Magnetic Variation(°)	Distance NM	Turn Direction	Altitude FT	Speed KT	Navigation Specification
10	CA	-	-	358(005.1)	+7.0		-	1000	-180	RNAV 1
20	DF	RA530	-	-	+7.0		L	-3000	-230	RNAV 1
30	TF	RA531	-	276(283.1)	+7.0	3.9	R	-3000		RNAV 1
40	TF	RA532	-	236(242.6)	+7.0	6.7	L	-3000		RNAV 1
50	TF	RA533	-	228(234.6)	+7.0	10.2	L	+070 FL		RNAV 1
60	TF	RA535	-	219(225.9)	+7.0	7.0	L	+100 FL		RNAV 1
70	TF	RA534	-	144(150.5)	+7.0	12.2	L	+150 FL		RNAV 1
80	TF	BERIL	-	142(148.8)	+7.0	11.3	-	+200 FL		RNAV 1

LAPSA 1J

Serial Number	Path Descriptor	Waypoint Identifier	Fly - over	Course °M(°T)	Magnetic Variation(°)	Distance NM	Turn Direction	Altitude FT	Speed KT	Navigation Specification
10	CA	-	-	358(005.1)	+7.0		-	1000	-180	RNAV 1
20	DF	RA530	-	-	+7.0		L	-3000	-230	RNAV 1
30	TF	RA531	-	276(283.1)	+7.0	3.9	R	-3000		RNAV 1
40	TF	RA540	-	305(311.6)	+7.0	10.3	R	-3000		RNAV 1
50	TF	RA542	-	300(306.6)	+7.0	11.8	-	+080 FL		RNAV 1
60	TF	RA543	-	301(307.9)	+7.0	12.8	-	+130 FL		RNAV 1
70	TF	LAPSA	-	287(293.9)	+7.0	6.4	L	+160 FL		RNAV 1

TENSI 1J

Serial Number	Path Descriptor	Waypoint Identifier	Fly - over	Course °M(°T)	Magnetic Variation(°)	Distance NM	Turn Direction	Altitude FT	Speed KT	Navigation Specification
10	CA	-	-	358(005.1)	+7.0		-	1000	-180	RNAV 1
20	DF	RA530	-	-	+7.0		L	-3000	-230	RNAV 1
30	TF	RA531	-	276(283.1)	+7.0	3.9	R	-3000		RNAV 1
40	TF	RA540	-	305(311.6)	+7.0	10.3	R	-3000		RNAV 1
50	TF	RA541	-	269(276.4)	+7.0	27.3	L	+140 FL		RNAV 1
60	TF	TENSI	-	252(258.8)	+7.0	9.5	L	+180 FL		RNAV 1

VALED 1J

Serial Number	Path Descriptor	Waypoint Identifier	Fly - over	Course °M(°T)	Magnetic Variation(°)	Distance NM	Turn Direction	Altitude FT	Speed KT	Navigation Specification
10	CA	-	-	358(005.1)	+7.0		-	1000	-180	RNAV 1
20	DF	RA530	-	-	+7.0		L	-3000	-230	RNAV 1
30	TF	RA531	-	276(283.1)	+7.0	3.9	R	-3000		RNAV 1
40	TF	RA532	-	236(242.6)	+7.0	6.7	L	-3000		RNAV 1
50	TF	RA533	-	228(234.6)	+7.0	10.2	L	+070 FL		RNAV 1
60	TF	VALED	-	255(261.7)	+7.0	25.4	R	+170 FL		RNAV 1

WAYPOINT COORDINATES

WPT	COORD	
ASKOR	562258.00N	0223646.00E
BERIL	562147.00N	0232535.00E
LAPSA	572013.00N	0223813.00E
TENSI	570347.00N	0221820.00E
VALED	564311.00N	0222743.00E
RA530	565506.10N	0234611.70E
RA531	565558.90N	0233913.60E
RA532	565254.51N	0232825.20E
RA533	564659.16N	0231315.50E
RA534	563128.84N	0231501.30E
RA535	564207.28N	0230408.50E
RA536	563142.20N	0224359.30E
RA540	570246.69N	0232510.20E
RA541	570538.91N	0223527.80E
RA542	570946.99N	0230746.30E
RA543	571737.01N	0224905.90E