


TRANSITION ALTITUDE
5000 FT

APP	129.925
	134.850 (HX)
TWR	118.105
ATIS	120.180

RIGA (EVRA)
RNAV (GNSS or DME/DME) RWY 36
(direction WEST)

ASKOR 1T, LAPSA 1T, LUTAL 1T, ORVIX 1T, TENSI 1T

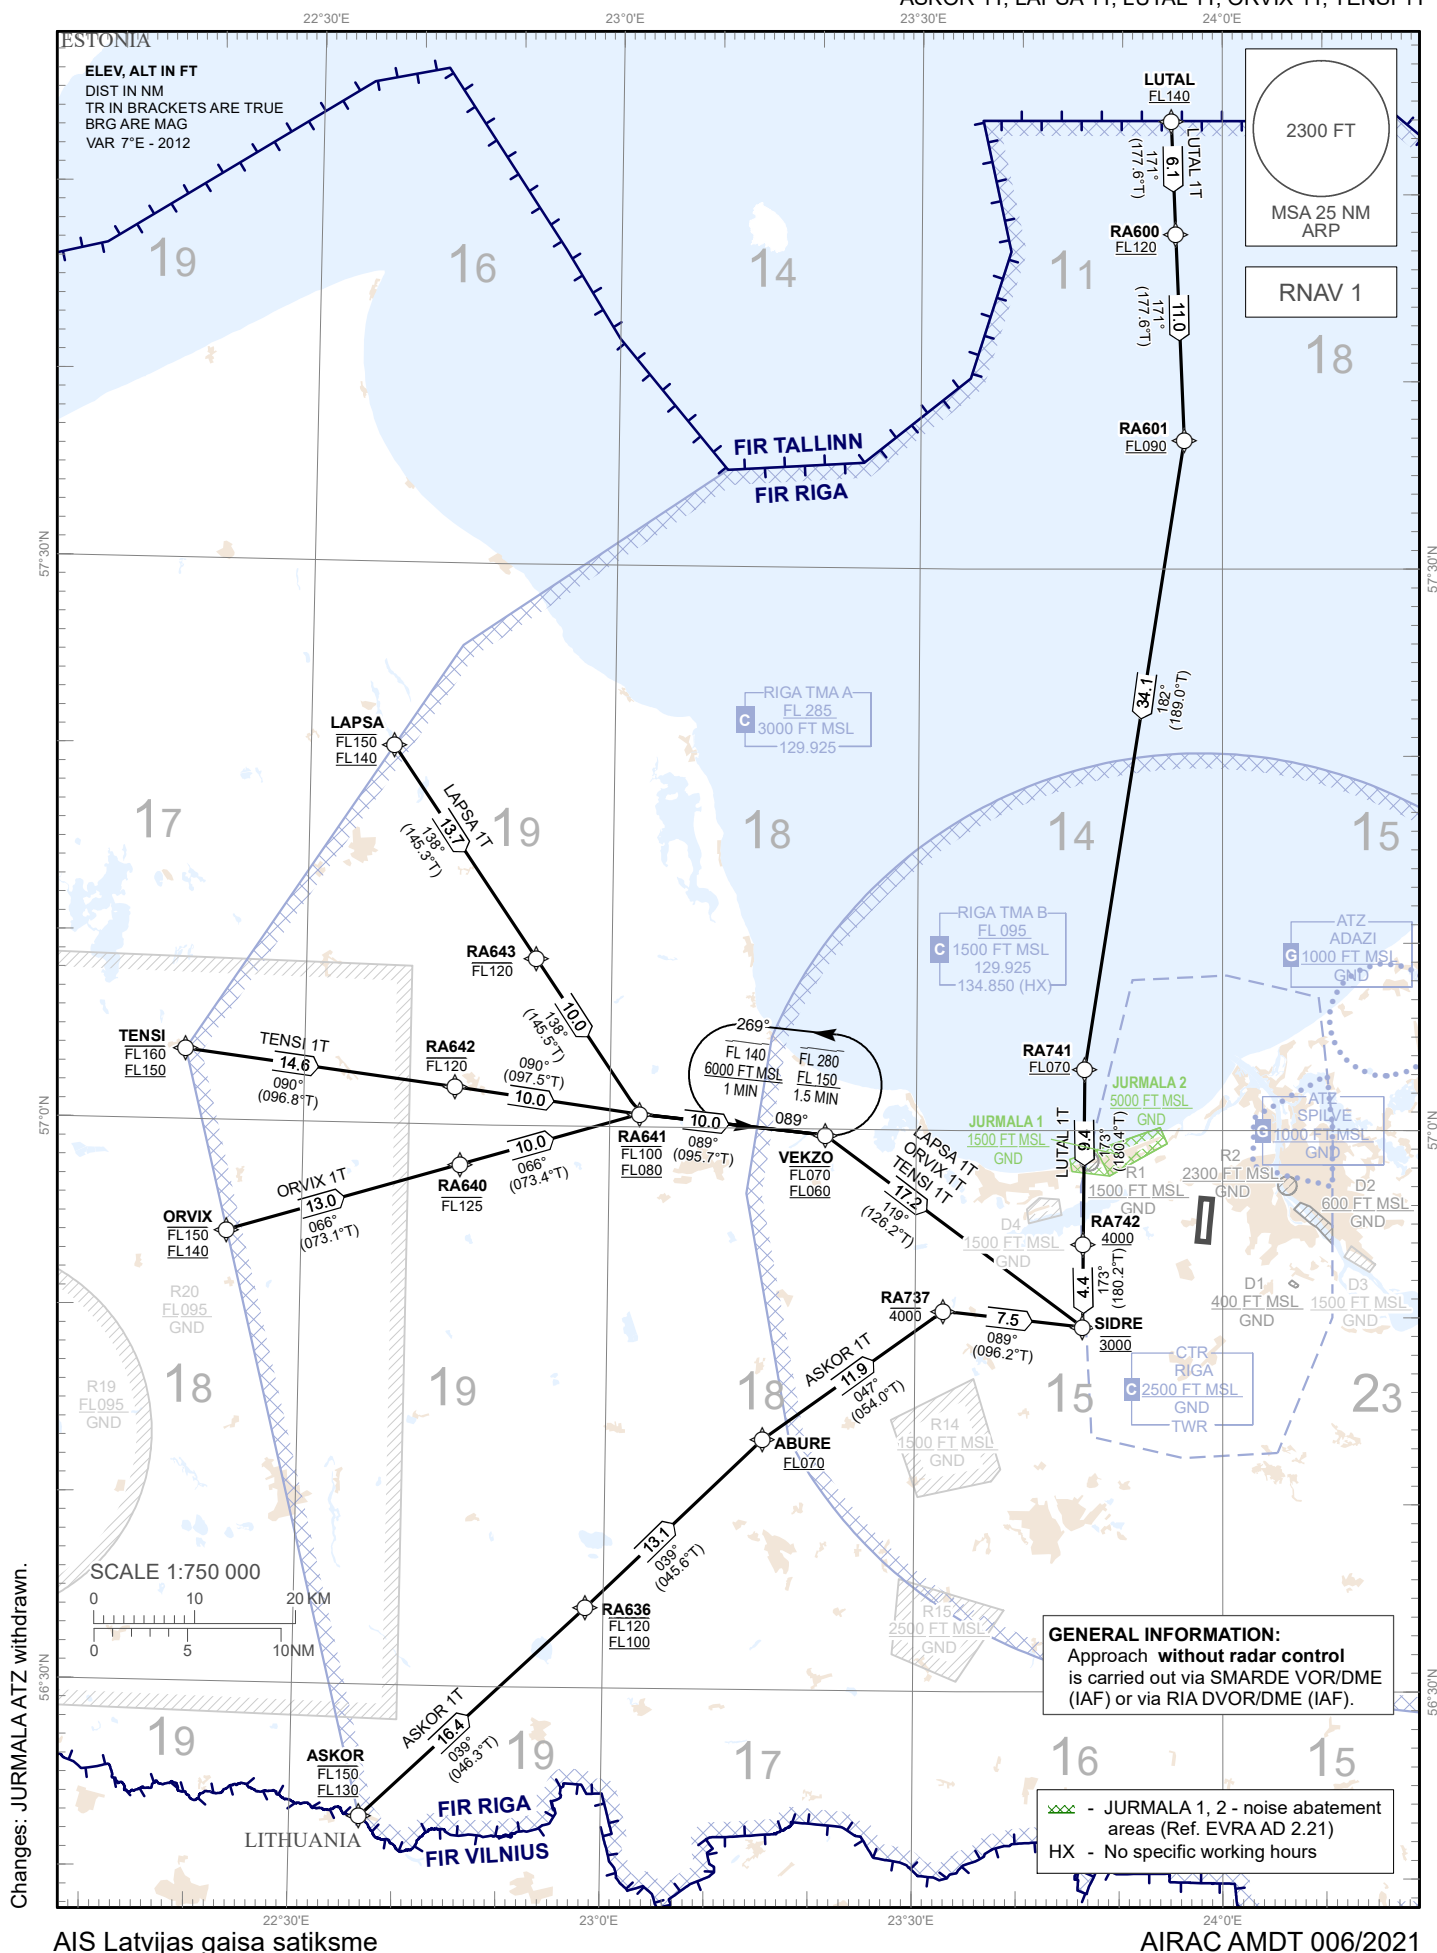

RNAV PROCEDURE CODING TABLES										
ASKOR 1T										
Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation (°)	Distance NM	Turn Direction	Altitude FT	Speed KT	Navigation Specification
10	IF	ASKOR	-	-	+7.0	-	-	+130 FL/-150 FL	-280	RNAV 1
20	TF	RA636	-	039 (046.3)	+7.0	16.4	L	+100 FL/-120 FL	-240	RNAV 1
30	TF	ABURE	-	039 (045.6)	+7.0	13.1	L	+070 FL		RNAV 1
40	TF	RA737	-	047 (054.0)	+7.0	11.9	R	-4000		RNAV 1
50	TF	SIDRE	-	089 (096.2)	+7.0	7.5	R	3000	210	RNAV 1
LAPSA 1T										
Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation (°)	Distance NM	Turn Direction	Altitude FT	Speed KT	Navigation Specification
10	IF	LAPSA	-	-	+7.0	-	-	+140 FL/-150 FL	-280	RNAV 1
20	TF	RA643	-	138 (145.3)	+7.0	13.7	R	-120 FL		RNAV 1
30	TF	RA641	-	138 (145.5)	+7.0	10.0	L	+080 FL/-100 FL	-240	RNAV 1
40	TF	VEKZO	-	089 (095.7)	+7.0	10.0	L	+060 FL/-070 FL	-230	RNAV 1
50	TF	SIDRE	-	119 (126.2)	+7.0	17.2	R	3000	210	RNAV 1
LUTAL 1T										
Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation (°)	Distance NM	Turn Direction	Altitude FT	Speed KT	Navigation Specification
10	IF	LUTAL	-	-	+7.0	-	-	+140 FL	-280	RNAV 1
20	TF	RA600	-	171 (177.6)	+7.0	6.1	L	+120 FL		RNAV 1
30	TF	RA601	-	171 (177.6)	+7.0	11.0	L	+090 FL		RNAV 1
40	TF	RA741	-	182 (189.0)	+7.0	34.1	R	+070 FL	-220	RNAV 1
50	TF	RA742	-	173 (180.4)	+7.0	9.4	L	+4000	210	RNAV 1
60	TF	SIDRE	-	173 (180.2)	+7.0	4.4	L	3000	210	RNAV 1
ORVIX 1T										
Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation (°)	Distance NM	Turn Direction	Altitude FT	Speed KT	Navigation Specification
10	IF	ORVIX	-	-	+7.0	-	-	+140 FL/-150 FL	-280	RNAV 1
20	TF	RA640	-	066 (073.1)	+7.0	13.0	L	-125 FL		RNAV 1
30	TF	RA641	-	066 (073.4)	+7.0	10.0	L	+080 FL/-100 FL	-240	RNAV 1
40	TF	VEKZO	-	089 (095.7)	+7.0	10.0	R	+060 FL/-070 FL	-230	RNAV 1
50	TF	SIDRE	-	119 (126.2)	+7.0	17.2	R	3000	210	RNAV 1
TENSI 1T										
Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation (°)	Distance NM	Turn Direction	Altitude FT	Speed KT	Navigation Specification
10	IF	TENSI	-	-	+7.0	-	-	+150 FL/-160 FL	-280	RNAV 1
20	TF	RA642	-	090 (096.8)	+7.0	14.6	L	-120 FL		RNAV 1
30	TF	RA641	-	090 (097.5)	+7.0	10.0	R	+080 FL/-100 FL	-240	RNAV 1
40	TF	VEKZO	-	089 (095.7)	+7.0	10.0	L	+060 FL/-070 FL	-230	RNAV 1
50	TF	SIDRE	-	119 (126.2)	+7.0	17.2	R	3000	210	RNAV 1

WAYPOINT COORDINATES					
WPT	COORD		WPT	COORD	
ABURE	564323.71N	0231514.90E	RA600	574753.06N	0235521.40E
ASKOR	562258.00N	0223646.00E	RA601	573653.33N	0235612.50E
LAPSA	572013.00N	0223813.00E	RA636	563416.96N	0225815.90E
LUTAL	575358.00N	0235453.00E	RA640	565752.69N	0224524.30E
ORVIX	565409.00N	0222245.00E	RA641	570042.44N	0230256.00E
SIDRE	564931.08N	0234620.70E	RA642	570201.47N	0224448.20E
TENSI	570347.00N	0221820.00E	RA643	570856.23N	0225234.30E
VEKZO	565941.96N	0232106.90E	RA737	565020.15N	0233244.40E
			RA741	570317.10N	0234630.00E
			RA742	565356.07N	0234622.10E

RNAV HOLDINGS					
Waypoint Identifier	INBD °M (°T)	Turn Direction	MNM/MAX HLDG	Speed KT	Time
VEKZO 565941.96N 0232106.90E	089 (095.7)	L	+6000/-140FL	-240	1 MIN
			+150FL/-280FL	-265	1.5 MIN