


STANDARD ARRIVAL CHART - INSTRUMENT (STAR) - ICAO

TRANSITION ALTITUDE 5000 FT
MAX 250 KIAS BELOW FL100

AFIS 129.400

LIEPAJA (EVLA)
RNP RWY 24

DESON 1D, FATXO 1D, LASMA 1D, RUCAV 1D

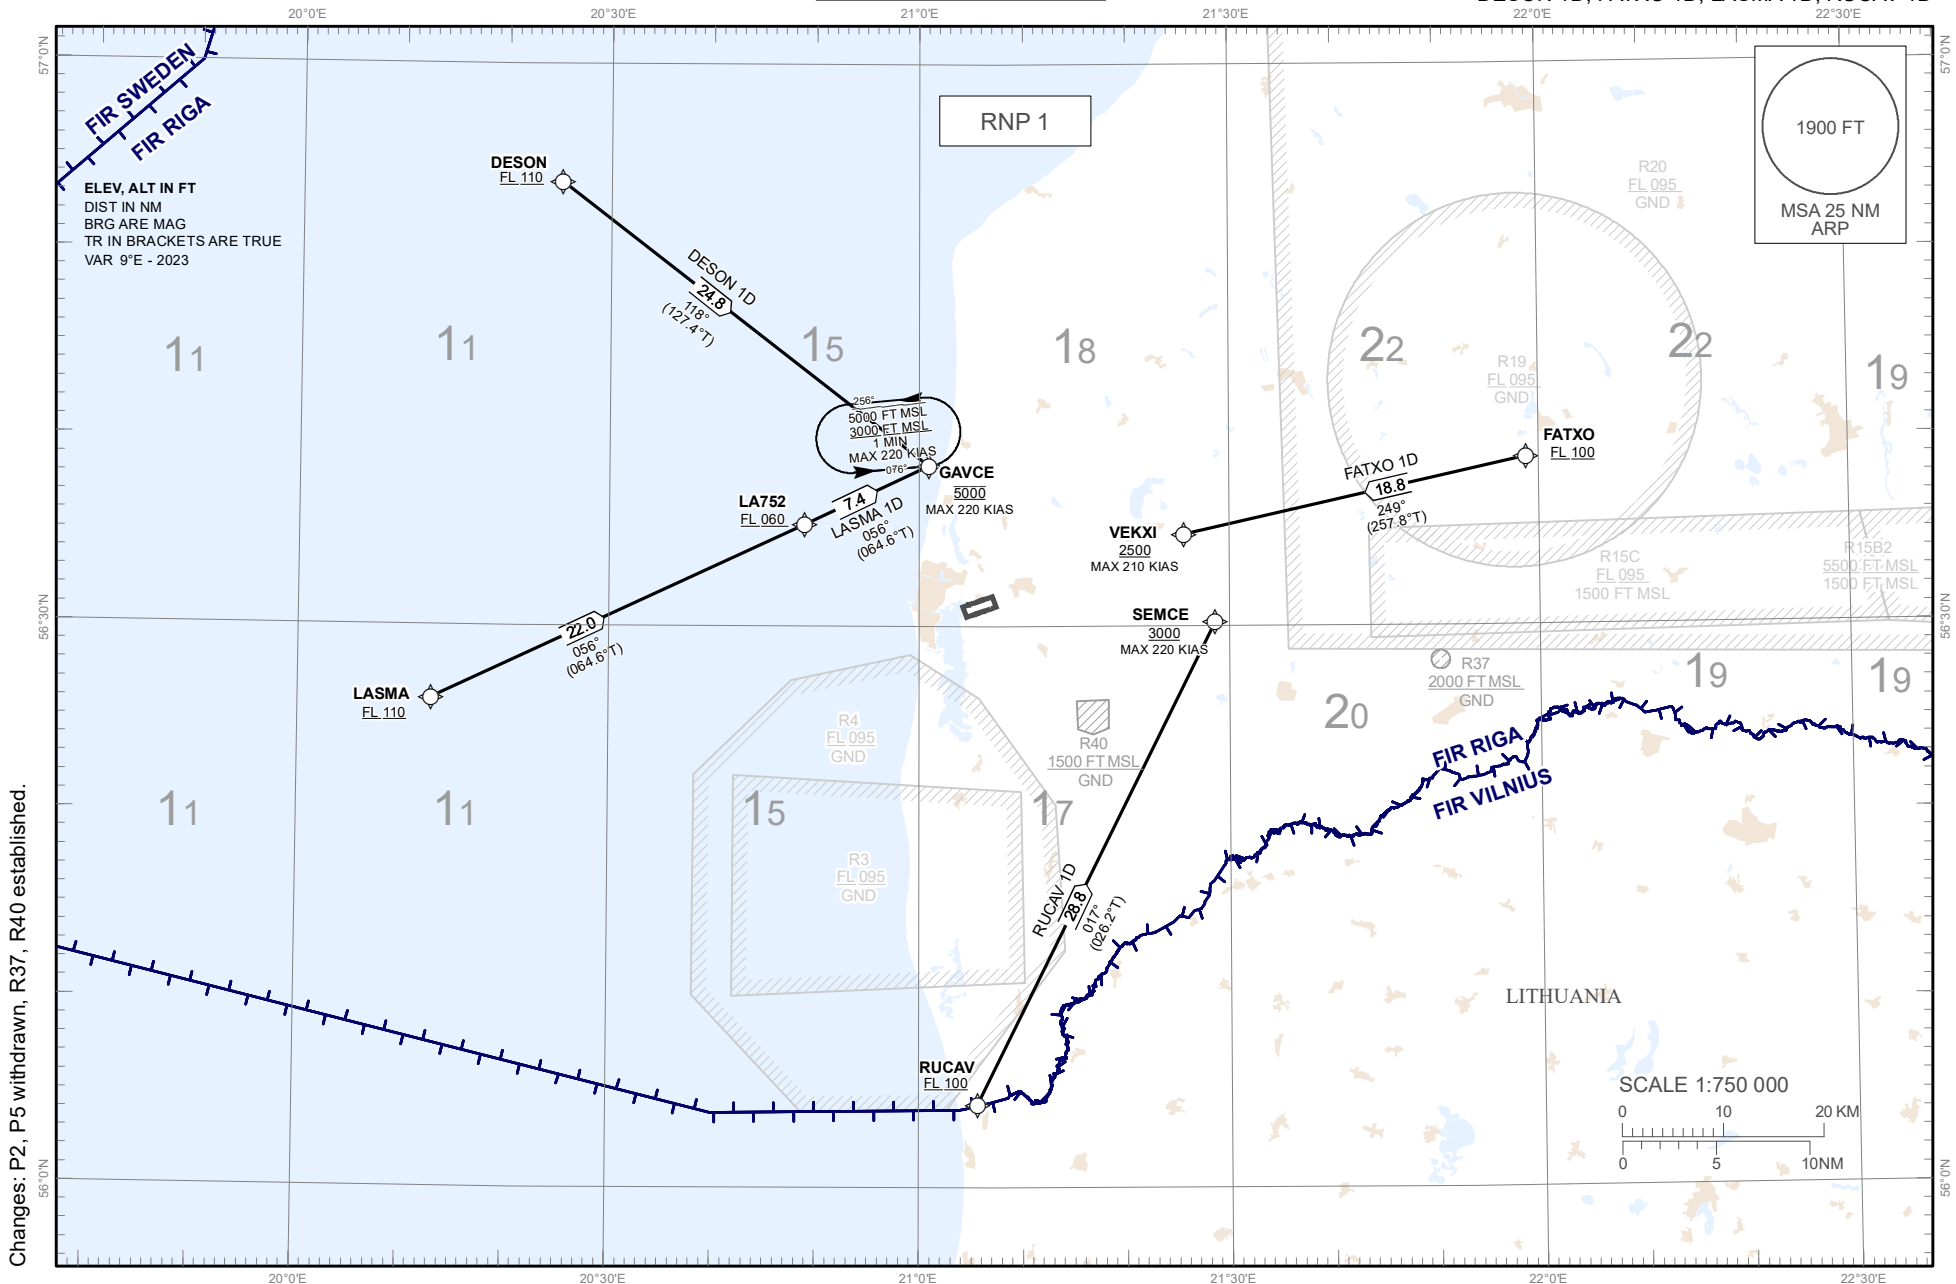

Changes: P2, P5 withdrawn, R37, R40 established.

PROCEDURE CODING TABLES

DESON 1D										
Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation (°)	Distance NM	Turn Direction	Altitude FT	Speed KT	Navigation Specification
10	IF	DESON	-	-	+9.0	-	-	+110 FL	-	RNP 1
20	TF	GAVCE	-	118(127.4)	+9.0	24.8	L	@5000	-220	RNP 1

FATXO 1D										
Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation (°)	Distance NM	Turn Direction	Altitude FT	Speed KT	Navigation Specification
10	IF	FATXO	-	-	+9.0	-	-	+100 FL	-	RNP 1
20	TF	VEKXI	-	249(257.8)	+9.0	18.8	R	+2500	-210	RNP 1

LASMA 1D										
Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation (°)	Distance NM	Turn Direction	Altitude FT	Speed KT	Navigation Specification
10	IF	LASMA	-	-	+9.0	-	-	+110 FL	-	RNP 1
20	TF	LA752	-	056(64.6)	+9.0	22.0	L	+060 FL	-	RNP 1
30	TF	GAVCE	-	056(64.6)	+9.0	7.4	L	@5000	-220	RNP 1

RUCAV 1D										
Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation (°)	Distance NM	Turn Direction	Altitude FT	Speed KT	Navigation Specification
10	IF	RUCAV	-	-	+9.0	-	-	+100 FL	-	RNP 1
20	TF	SEMCE	-	017(26.2)	+9.0	28.8	R	+3000	-220	RNP 1

Leg sequence	Path Descriptor	Waypoint Identifier	Fly-over	Course °M(°T)	Magnetic Variation	Time (min)	Turn Direction	MNM Altitude FT	MAX Altitude FT	MAX Speed KT	Navigation Specification
HLDG	HM	GAVCE	Y	076(084.8)	+9.0	1	L	3000	5000	220	RNAV 1

WAYPOINT COORDINATES

WPT	COORD	
DESON	56°53'41.00"N	020°25'13.00"E
FATXO	56°38'57.67"N	021°58'49.37"E
GAVCE	56°38'34.60"N	021°00'55.90"E
LA752	56°35'25.85"N	020°48'51.90"E
LASMA	56°26'07.00"N	020°12'55.00"E
RUCAV	56°04'26.00"N	021°05'37.00"E
SEMCE	56°30'13.12"N	021°28'36.78"E
VEKXI	56°34'55.29"N	021°25'35.72"E