


STANDARD ARRIVAL CHART - INSTRUMENT (STAR) - ICAO

TRANSITION ALTITUDE 5000 FT  
MAX IAS 250 kt BELOW FL100

APP 129.925  
TWR 134.850 (HX)  
118.105  
ATIS 120.180

RIGA (EVRA)  
RNAV RWY36  
(direction EAST)

AMOLI 2U, BARVA 2U, ERIVA 2U, GUNTA 2U, LUTAL 2U, TUSAS 2U, VANAG 2U

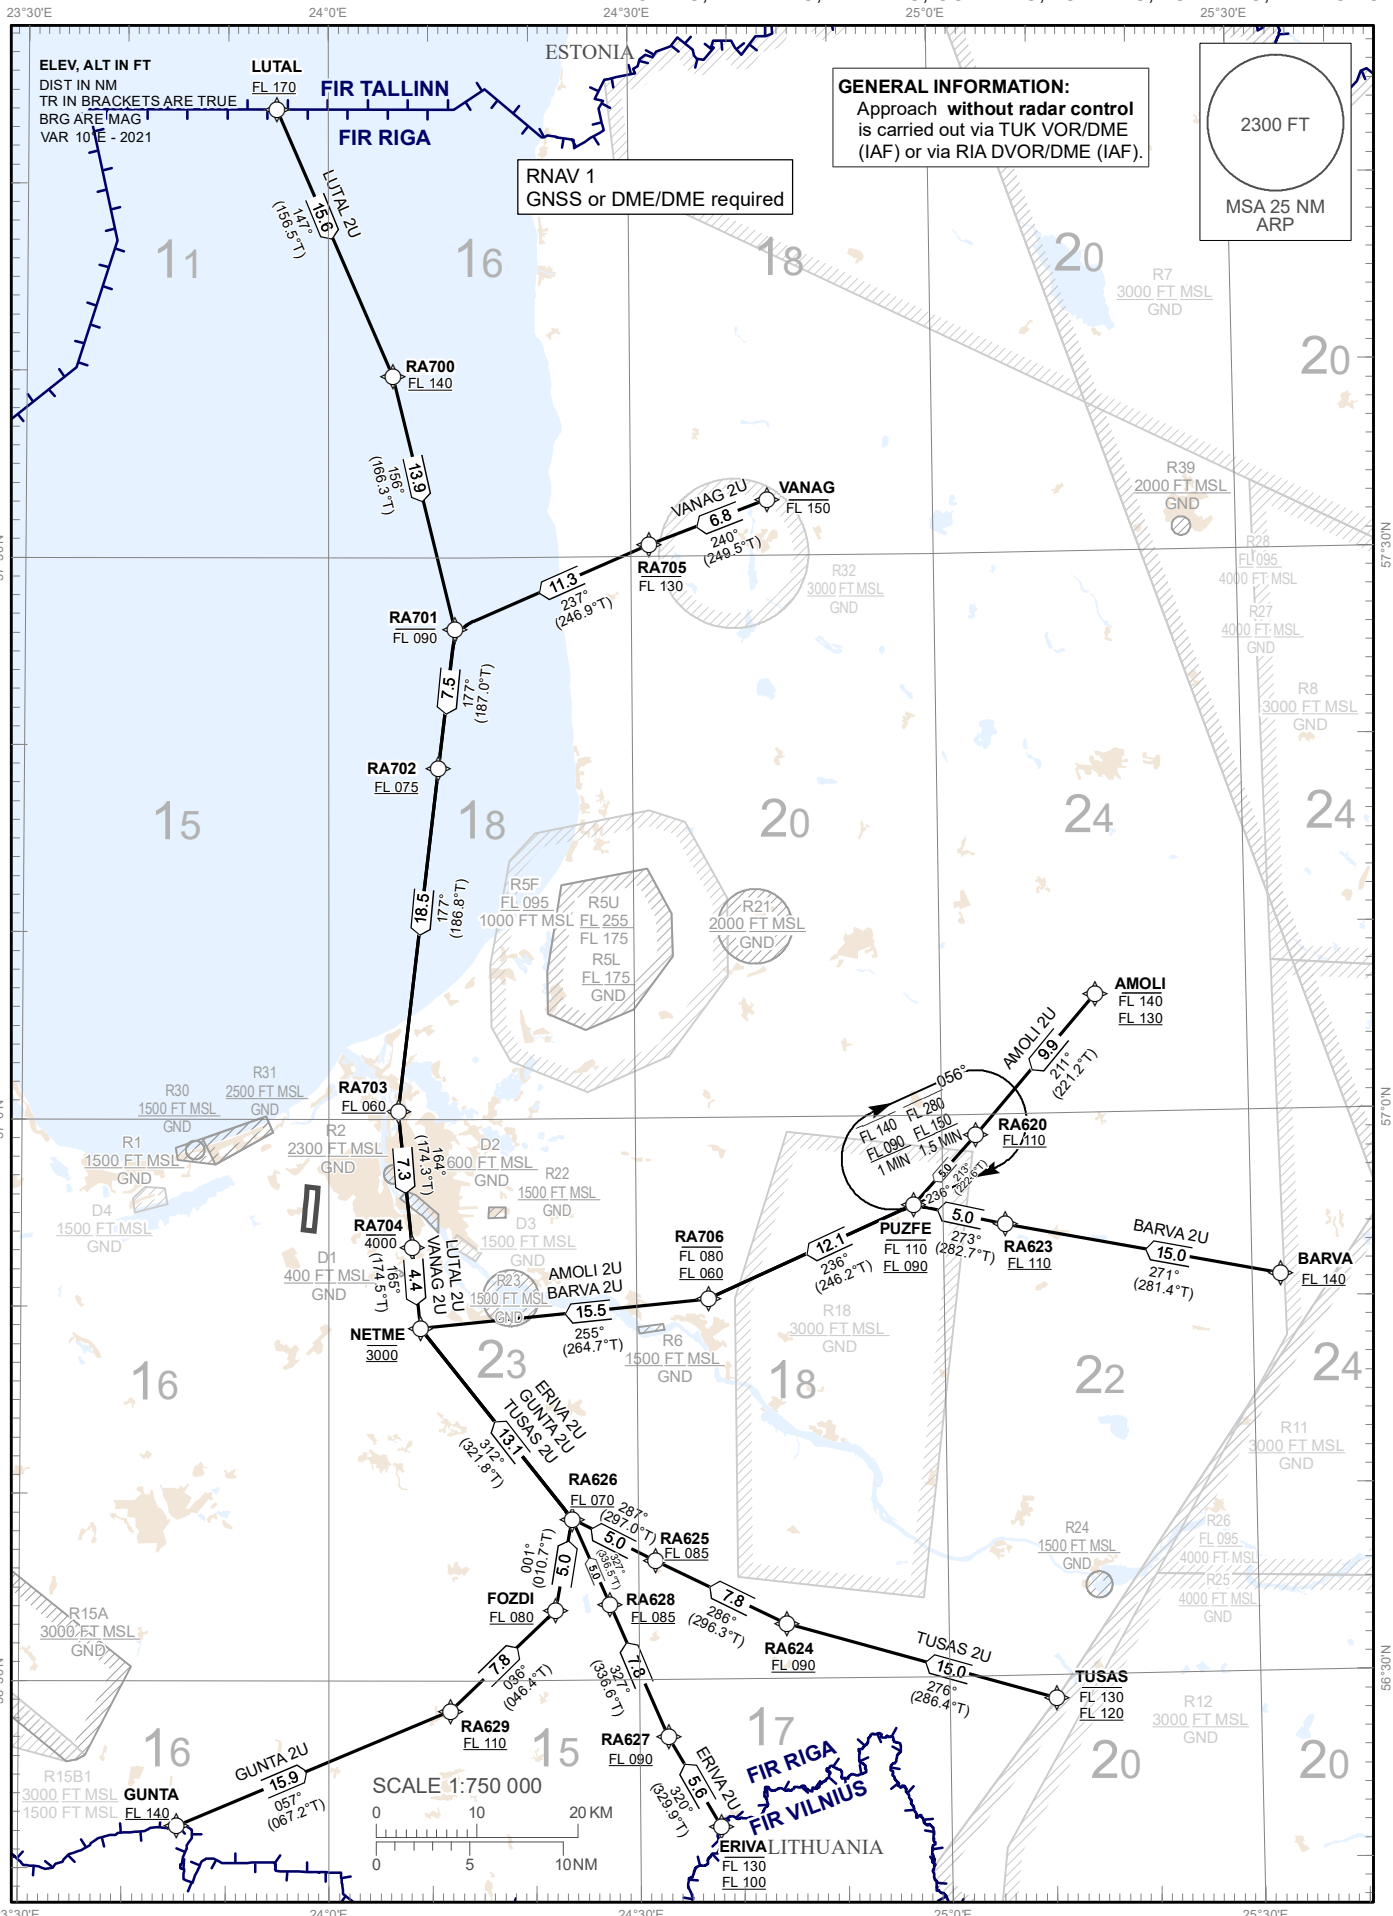

Changes: R32 established.

RNAV PROCEDURE CODING TABLES

AMOLI 2U										
Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation (°)	Distance NM	Turn Direction	Altitude FT	Speed KT	Navigation Specification
10	IF	AMOLI	-	-	+10.0	-	-	+130 FL/-140 FL	-280	RNAV 1
20	TF	RA620	-	211 (221.2)	+10.0	9.9	L	+110 FL		RNAV 1
30	TF	PUZFE	-	213 (222.6)	+10.0	5.0	R	+090 FL/-110 FL	-250	RNAV 1
40	TF	RA706	-	236 (246.2)	+10.0	12.1	R	+060 FL/-080 FL	-230	RNAV 1
50	TF	NETME	-	255 (264.7)	+10.0	15.5	R	@3000	-210	RNAV 1

BARVA 2U										
Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation (°)	Distance NM	Turn Direction	Altitude FT	Speed KT	Navigation Specification
10	IF	BARVA	-	-	+10.0	-	-	+140 FL	-280	RNAV 1
20	TF	RA623	-	271 (281.4)	+10.0	15.0	R	+110 FL		RNAV 1
30	TF	PUZFE	-	273 (282.7)	+10.0	5.0	R	+090 FL/-110 FL	-250	RNAV 1
40	TF	RA706	-	236 (246.2)	+10.0	12.1	L	+060 FL/-080 FL	-230	RNAV 1
50	TF	NETME	-	255 (264.7)	+10.0	15.5	R	@3000	-210	RNAV 1

ERIVA 2U										
Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation (°)	Distance NM	Turn Direction	Altitude FT	Speed KT	Navigation Specification
10	IF	ERIVA	-	-	+10.0	-	-	+100 FL/-130 FL	-250	RNAV 1
20	TF	RA627	-	320 (329.9)	+10.0	5.6	R	+090 FL		RNAV 1
30	TF	RA628	-	327 (336.6)	+10.0	7.8	R	+085 FL		RNAV 1
40	TF	RA626	-	327 (336.5)	+10.0	5.0	L	+070 FL	-220	RNAV 1
50	TF	NETME	-	312 (321.8)	+10.0	13.1	L	@3000	-210	RNAV 1

GUNTA 2U										
Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation (°)	Distance NM	Turn Direction	Altitude FT	Speed KT	Navigation Specification
10	IF	GUNTA	-	-	+10.0	-	-	+140 FL	-280	RNAV 1
20	TF	RA629	-	057 (067.2)	+10.0	15.9	R	+110 FL		RNAV 1
30	TF	FOZDI	-	036 (046.4)	+10.0	7.8	L	+080 FL	-230	RNAV 1
40	TF	RA626	-	001 (010.7)	+10.0	5.0	L	+070 FL	-220	RNAV 1
50	TF	NETME	-	312 (321.8)	+10.0	13.1	L	@3000	-210	RNAV 1

LUTAL 2U										
Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation (°)	Distance NM	Turn Direction	Altitude FT	Speed KT	Navigation Specification
10	IF	LUTAL	-	-	+10.0	-	-	+170 FL	-280	RNAV 1
20	TF	RA700	-	147 (156.5)	+10.0	15.6	L	+140 FL	-250	RNAV 1
30	TF	RA701	-	156 (166.3)	+10.0	13.9	R	-090 FL		RNAV 1
40	TF	RA702	-	177 (187.0)	+10.0	7.5	R	+075 FL		RNAV 1
50	TF	RA703	-	177 (186.8)	+10.0	18.5	L	+060 FL		RNAV 1
60	TF	RA704	-	164 (174.3)	+10.0	7.3	L	-4000		RNAV 1
70	TF	NETME	-	165 (174.5)	+10.0	4.4	R	@3000	-210	RNAV 1

TUSAS 2U										
Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation (°)	Distance NM	Turn Direction	Altitude FT	Speed KT	Navigation Specification
10	IF	TUSAS	-	-	+10.0	-	-	+120 FL/-130 FL	-250	RNAV 1
20	TF	RA624	-	276 (286.4)	+10.0	15.0	L	+090 FL	-240	RNAV 1
30	TF	RA625	-	286 (296.3)	+10.0	7.8	R	+085 FL		RNAV 1
40	TF	RA626	-	287 (297.0)	+10.0	5.0	R	+070 FL	-220	RNAV 1
50	TF	NETME	-	312 (321.8)	+10.0	13.1	R	@3000	-210	RNAV 1

VANAG 2U										
Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation (°)	Distance NM	Turn Direction	Altitude FT	Speed KT	Navigation Specification
10	IF	VANAG	-	-	+10.0	-	-	-150 FL	-280	RNAV 1
20	TF	RA705	-	240 (249.5)	+10.0	6.8	R	-130 FL	-240	RNAV 1
30	TF	RA701	-	237 (246.9)	+10.0	11.3	L	-090 FL		RNAV 1
40	TF	RA702	-	177 (187.0)	+10.0	7.5	L	+075 FL		RNAV 1
50	TF	RA703	-	177 (186.8)	+10.0	18.5	L	+060 FL		RNAV 1
60	TF	RA704	-	164 (174.3)	+10.0	7.3	L	-4000		RNAV 1
70	TF	NETME	-	165 (174.5)	+10.0	4.4	R	@3000	-210	RNAV 1

WAYPOINT COORDINATES

WPT	COORD	
AMOLI	570621.00N	0251515.00E
BARVA	565114.00N	0253248.00E
ERIVA	562208.00N	0243749.00E
FOZDI	563344.01N	0242155.30E
GUNTA	562217.00N	0234520.00E
LUTAL	575358.00N	0235453.00E
NETME	564851.49N	0240854.70E
PUZFE	565513.53N	0245707.20E
TUSAS	562846.00N	0251018.00E
VANAG	573301.00N	0244333.00E

WPT	COORD	
RA620	565853.88N	0250318.00E
RA623	565407.93N	0250601.20E
RA624	563256.90N	0244416.30E
RA625	563622.40N	0243140.20E
RA626	563838.19N	0242336.00E
RA627	562656.71N	0243246.70E
RA628	563403.62N	0242712.30E
RA629	562823.56N	0241145.20E
RA700	573942.79N	0240624.90E
RA701	572611.98N	0241232.60E
RA702	571845.09N	0241051.30E
RA703	570025.30N	0240650.40E
RA704	565312.75N	0240808.90E
RA705	573039.01N	0243148.80E
RA706	565020.24N	0243700.50E

RNAV HOLDINGS

Waypoint Identifier	INBD °M (°T)	Turn Direction	MNM/MAX HLDG	Speed KT	Time
PUZFE	236 (246.2)	R	+090FL/-140FL	-240	1 MIN
565513.53N 0245707.20E			+150FL/-280FL	-265	1.5 MIN