


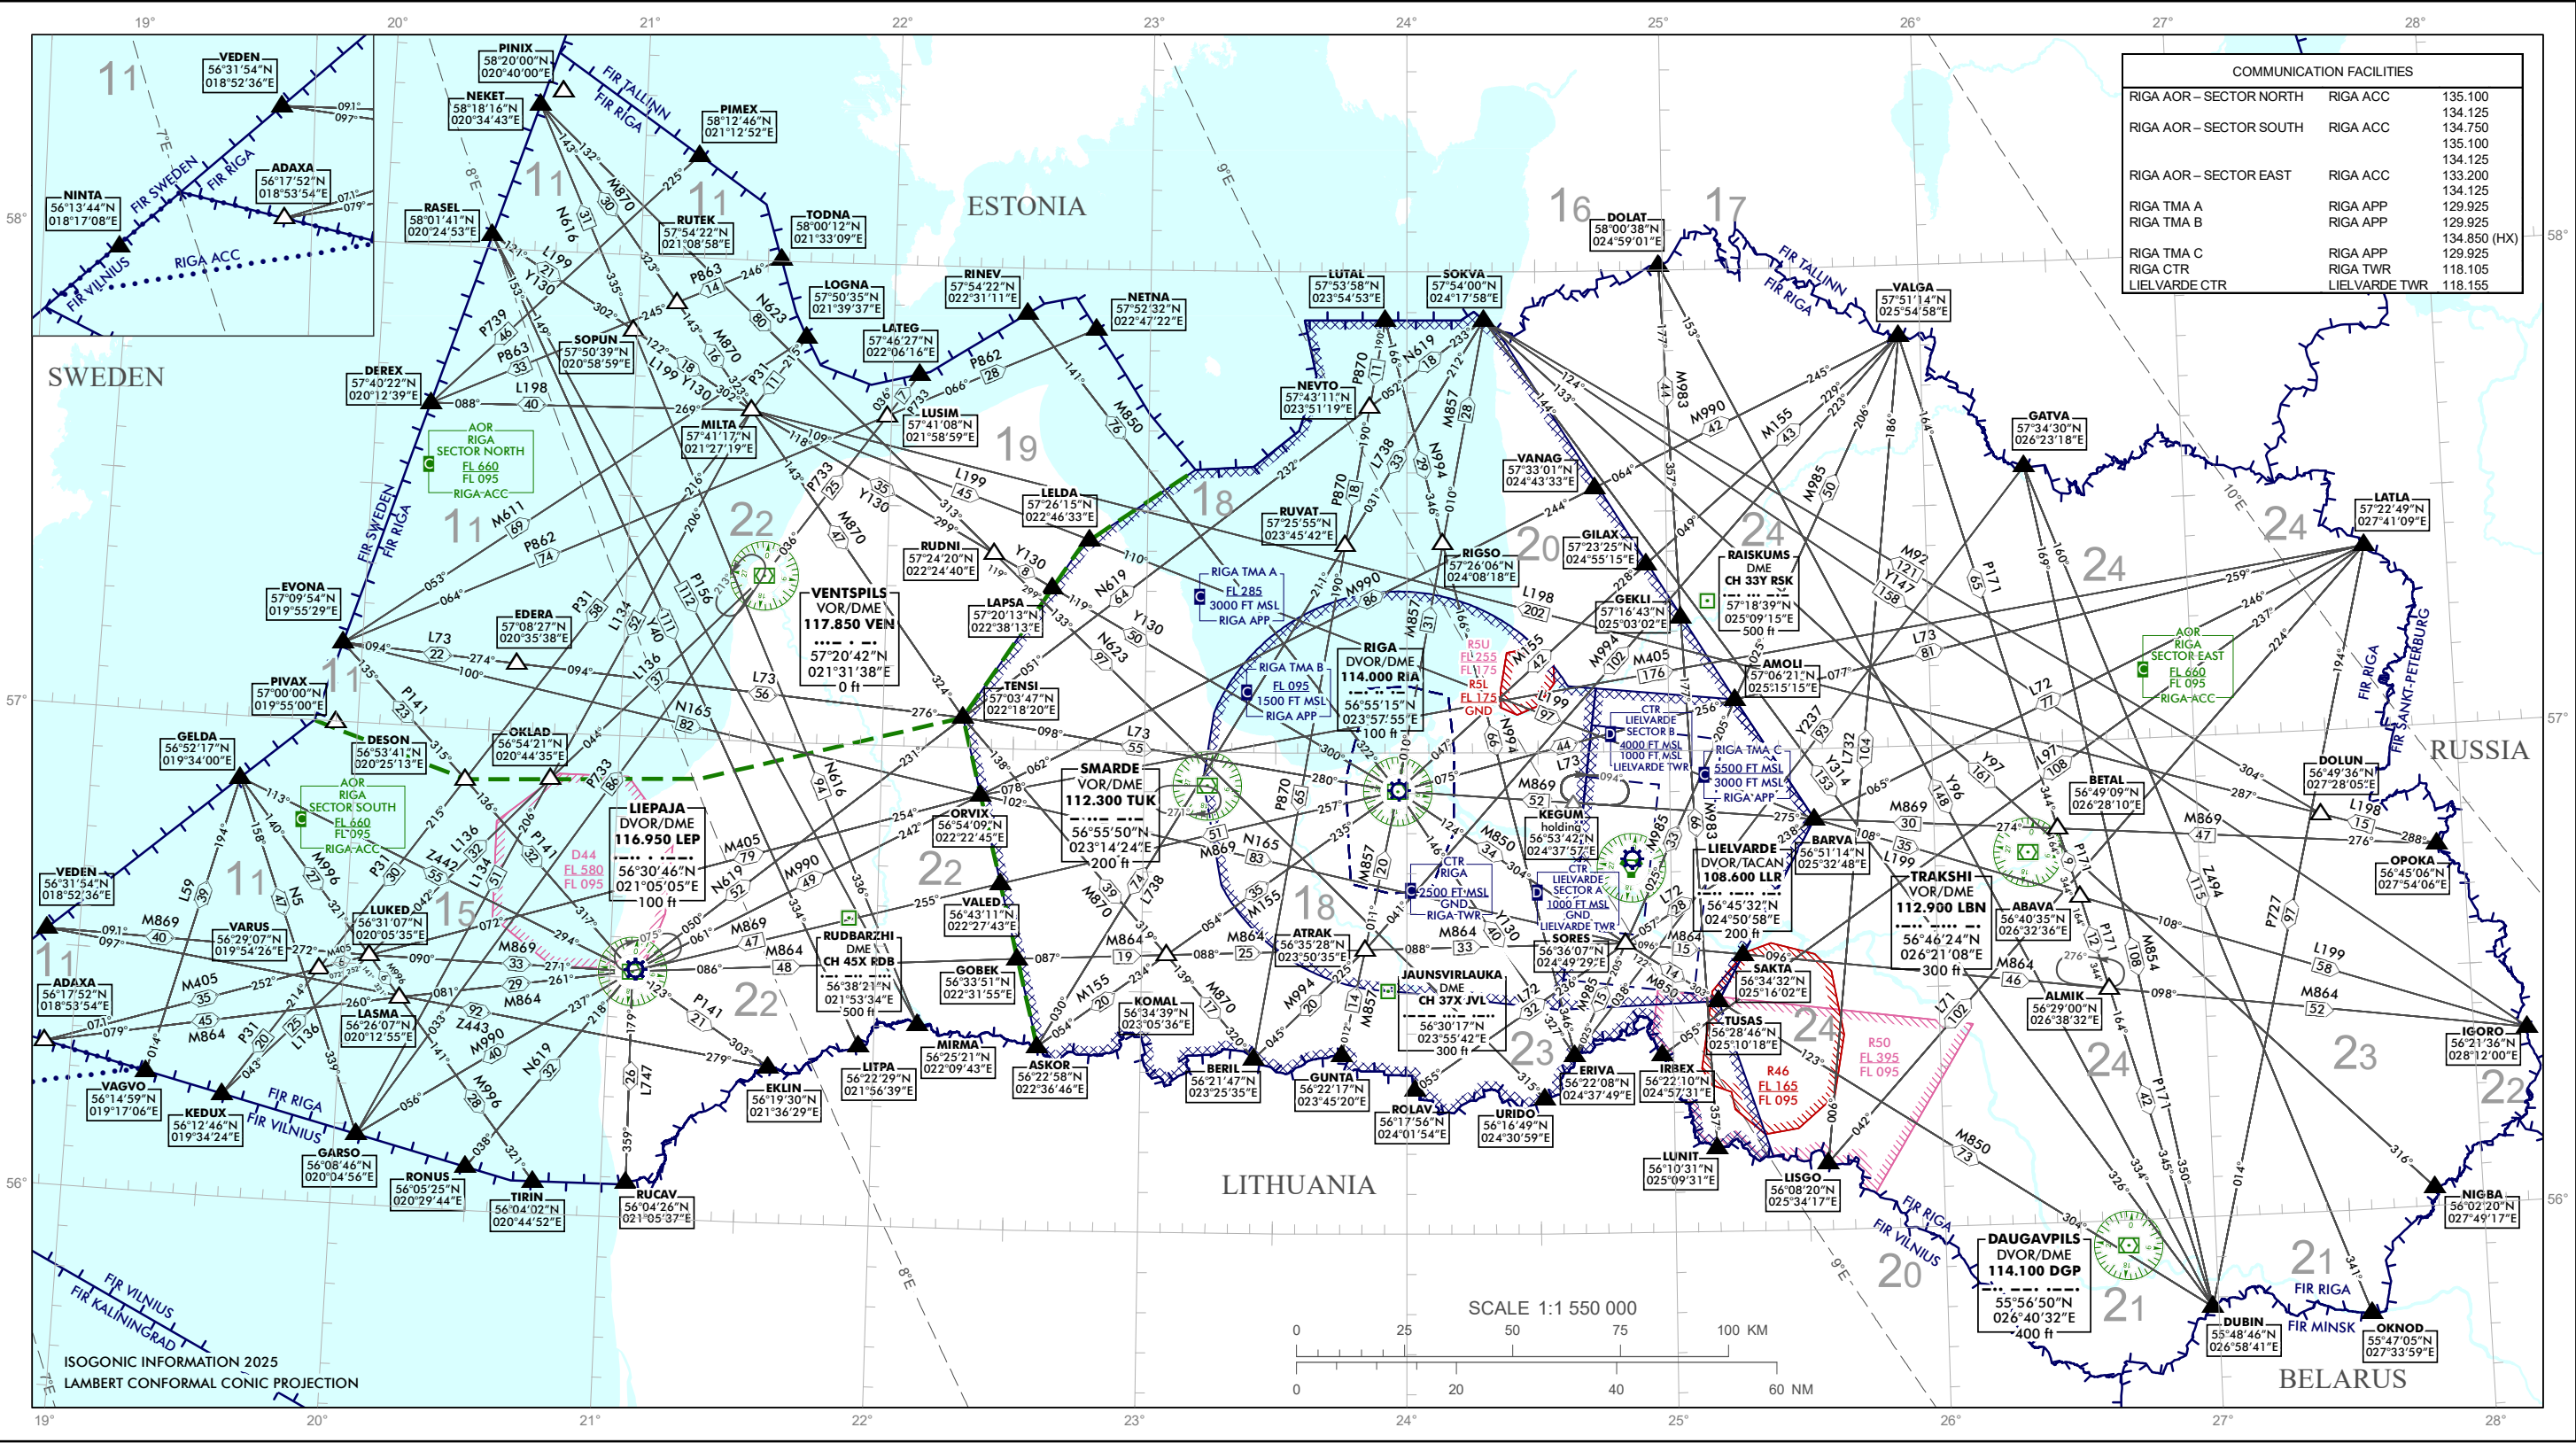

Changes: R46 updated.

ATS airspace classification

FIR UNL FL 660 FL 095 GND Riga ACC	CTA Riga FL 660 FL 095 Riga ACC	TMA Riga FL 285 1500 FT MSL Riga APP	AOR Riga UNL FL 660 FL 095 GND Riga ACC
---	--	---	--

Area minimum altitude (AMA)

Each 1° quadrilateral contains Area minimum altitude (AMA) which represents the lowest altitude which may be used under instrument meteorological conditions (IMC). The AMA provides a minimum clearance of 1000 FT above all obstacles in the quadrilateral. It is represented in hundreds of feet above mean sea level.

Example: 1700 FT - 17

NOTE: All specified AMA values apply Riga FIR (EVRR).

Note:

- Altitudes and elevations are in FT
- Distances are in NM and tracks are TRUE bearing
- For RNAV routes - RNAV 5
- Holdings - ref. ENR 3.6
- HX - No specific working hours
- Legend see GEN 2.3 (Chart Symbols)
- WPT PINIX, PIVAX for State ACFT only
- TRA and TSA are depicted in the charts ENR 6.4, ENR 6.5

INTENTIONALLY LEFT BLANK