


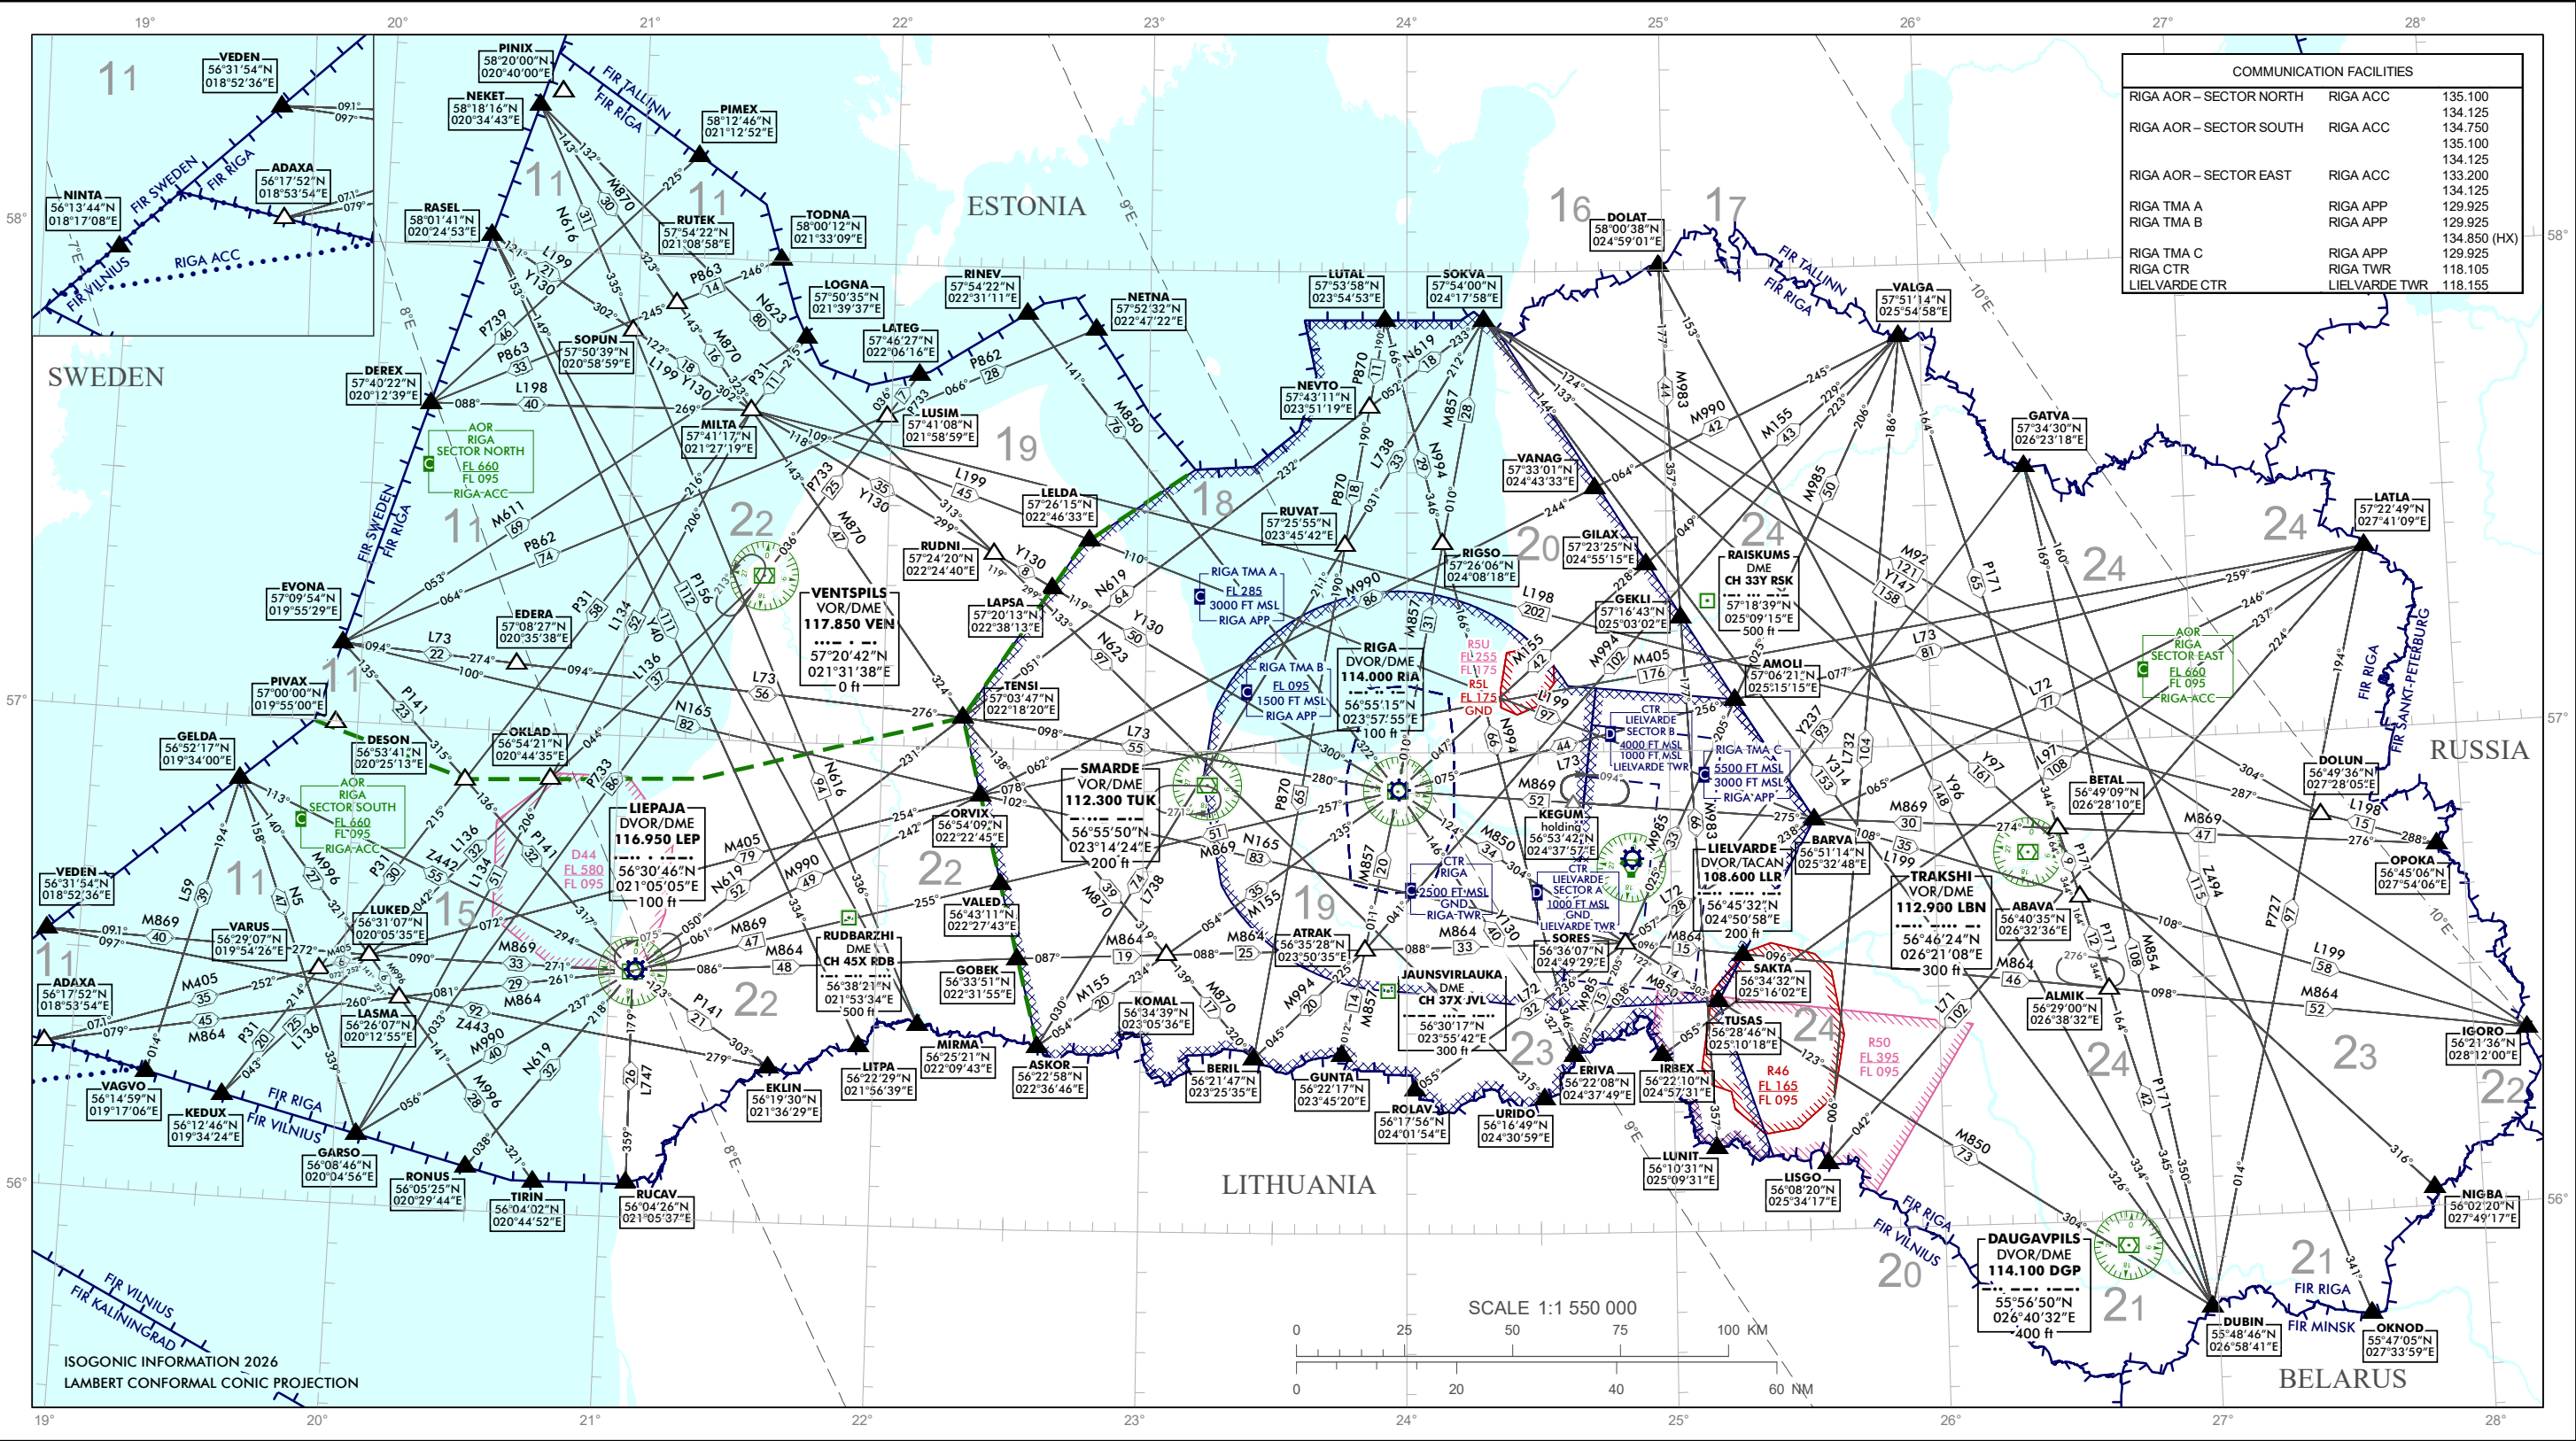

Changes: AMA and isogones updated, note added.

ATS airspace classification

FIR
UNL
FL 660
FL 095
GND
Riga ACC

CTA
Riga
FL 660
FL 095
Riga ACC

TMA
Riga
FL 285
1500 FT MSL
Riga APP

AOR
Riga
UNL
FL 660
FL 095
GND
Riga ACC

Area minimum altitude (AMA)

Each 1° quadrilateral contains Area minimum altitude (AMA) which represents the lowest altitude which may be used under instrument meteorological conditions (IMC). The AMA provides a minimum clearance of 1000 FT above all obstacles in the quadrilateral. It is represented in hundreds of feet above mean sea level.

Example: 1700 FT - 17

NOTE: All specified AMA values apply Riga FIR (EVRR).

Notes:

- Altitudes and elevations are in FT
- Distances are in NM and tracks are TRUE bearing
- For RNAV routes - RNAV 5
- Holdings - ref. ENR 3.6
- HX - No specific working hours
- Legend see GEN 2.3 (Chart Symbols)
- WPT PINIX, PIVAX for State ACFT only
- TRA and TSA are depicted in the charts ENR 6.4, ENR 6.5
- Restricted and Danger Areas for National Security Operations (NSO): see ENR 6.4.

INTENTIONALLY LEFT BLANK