



REPUBLIC OF LATVIA

Tel: +371 67300664
 Fax: +371 67300660
 Email: ais@lgs.lv
 AFS: EVRAYNYX
 URL: https://ais.lgs.lv

State Joint-stock Company
 "Latvijas gaisa satiksme"
 Aeronautical
 Information Service.
 Muzeju iela 3
 Lidosta "Rīga"
 Mārupes pag., Mārupes nov.
 LV-1053, Latvija

AIP SUP 026/2026
Effective from 28 AUG 2026
to 30 SEP 2026
Published on 28 AUG 2026

RIGA AERODROME (EVRA) - MOBILE CRANES OPERATING IN THE VICINITY OF THE AERODROME

Replaces AIP SUP 024/2026

Incorporates NOTAM A4384/26, A4387/26, A4388/26

1. General

From 28 AUG 2026 until 30 SEP 2026, daily from 0330-1630 UTC mobile cranes are operating in the vicinity of the aerodrome due to the construction of a new ATC tower. The cranes penetrate the Aerodrome Obstacle Limitation Surfaces.

The mobile cranes are operating in the area with coordinates:

565528.3N 0235847.7E - 565528.3N 0235851.9E -

565525.3N 0235851.7E - 565525.5N 0235846.6E -

565527.6N 0235847.0E - 565528.0N 0235847.6E -

565528.3N 0235847.7E

Distance: 520 M from ARP and direction 84°.

Maximum elevation: 279 FT (85 M) AMSL, 246 FT (75 M) AGL.

The cranes are equipped with type A medium intensity white flashing light.

See Appendix 1.

2. Impact on Obstacle Clearance Altitudes (Height) (OCA (H))

During mobile crane operations, the OCA (H) values are increased for the following instrument approach procedures:

RNP Y RWY18 (Ref: AIP EVRA AD 2.24.13-5)

OCA (H)		A	B	C	D
Straight-in Approach	LNAV	420(380)			
	LNAV/VNAV	318 (285)	330 (297)	349 (316)	376 (343)

RNP Z RWY18 (AR) (Ref: AIP EVRA AD 2.24.13-7)

OCA (H)	A	B	C	D
RNP 0.3	410 (377)	422 (389)	430 (397)	441 (408)

VOR RWY18 (Ref: AIP EVRA AD 2.24.13-9)

OCA (H)		A	B	C	D
Straight-in	VOR/DME	490 (450)			
Approach					

LOC Y RWY18 (Ref: AIP EVRA AD 2.24.13-11)

OCA (H)		A	B	C	D
Straight-in	LOC	420 (390)			
Approach					

LOC Z RWY18 (Ref: AIP EVRA AD 2.24.13-13)

OCA (H)		A	B	C	D
Straight-in	LOC	420 (390)			
Approach					

RNP Y RWY36 (Ref: AIP EVRA AD 2.24.13-15)

OCA (H)		A	B	C	D
Straight-in	LNAV/VNAV	289 (252)	303 (265)	310 (273)	330 (293)
Approach					

RNP Z RWY36 (AR) (Ref: AIP EVRA AD 2.24.13-17)

OCA (H)	A	B	C	D
RNP 0.3	409 (372)	421 (384)	429 (392)	440 (403)

3. Impact on ILS LOC classification

During mobile crane operations, the ILS LOC RWY18 classification is changed to II/T/3 (Ref: AIP EVRA AD 2.19; AIP GEN 3.4).


4. Additional information

1. The new ATC tower is included as an obstacle in the Obstacle Data Set effective 19 MAR 2026 (UUID: 3bf43c8f-3221-4af7-83f6-e45b18e3c9ff).
2. A NOTAM will be issued to inform users of the mobile crane operation schedule and any changes to it.

AIP SUP 026/2026
APPENDIX 1

MOBILE CRANES OPERATING AREA

AIP LATVIA

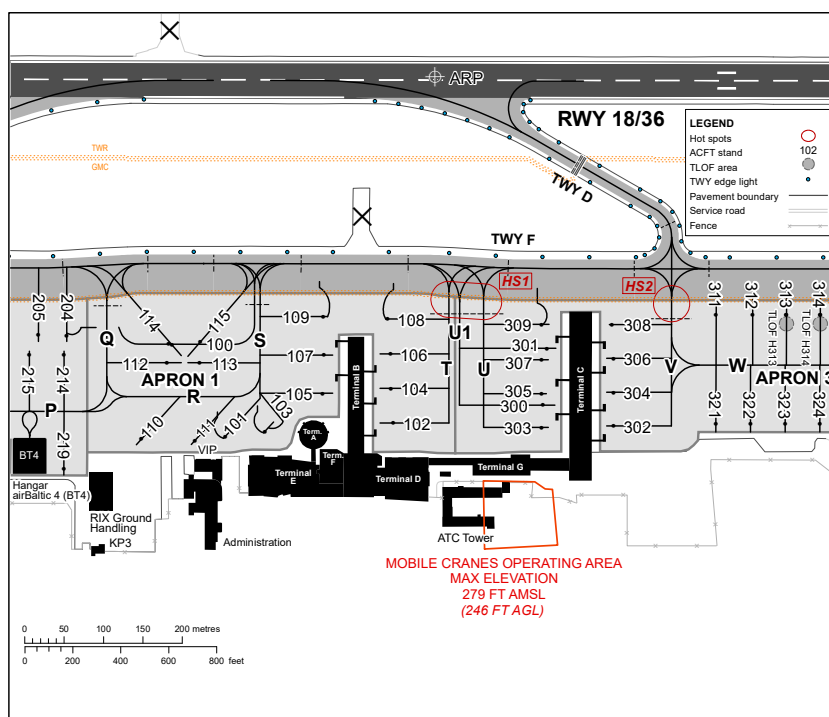

AIS Latvijas gaisa satiksme

PAGE INTENTIONALLY LEFT BLANK