



REPUBLIC OF LATVIA

AIRAC

Tel: +371 67300664
Fax: +371 67300660
Email: ais@lgs.lv
AFS: EVRAYNYX
URL: https://ais.lgs.lv

State Joint-stock Company
"Latvijas gaisa satiksme"
Aeronautical
Information Service.
Muzeju iela 3
Lidosta "Rīga"
Mārupes pag., Mārupes nov.
LV-1053, Latvija

AIRAC AIP SUP 016/2025
Effective from 10 JUL 2025
to 03 SEP 2025
Published on 30 JUN 2025

RIGA AERODROME (EVRA) - CHANGES TO AIRCRAFT STANDS

Replaces AIRAC AIP SUP 012/2025

The information on stands and taxilanes in the table on chart page EVRA AD 2.24.2-1 has been corrected.

REF: EVRA AD 2.8, EVRA AD 2.20, EVRA AD 2.24.2

The information from this AIRAC AIP SUP will be incorporated into the AIP of Latvia with the effective date of **04 SEP 2025**.

1. CHANGES

EVRA AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS/POSITIONS DATA

The information on Apron 1 referring to stands is updated and reads as follows:

1.	Apron designation, surface and strength	APRON 1 Surface: CONC_ASPH Strength: NIL Stands 100-115 CONC PCN 120/R/C/W/T Taxilane Q CONC PCN 120/R/C/W/T Taxilane R CONC PCN 120/R/C/W/T Taxilane S ASPH PCN 75/F/A/W/T Taxilane T ASPH PCN 60/F/A/W/T
----	---	---

EVRA AD 2.20 LOCAL AERODROME REGULATION

The information in Item 8.3 is updated and reads as follows:

8.3 On stands 105, 302-307, 326, 511 and 512, for Code C aircraft, the minimum clearance distance (4.5 m) from the apron safety line to the aircraft nose, winglet or engine inlet is reduced up to 3 m. On stand 301, for Code E aircraft, the minimum clearance distance (7.5 m) from the apron safety line to the aircraft nose is reduced to 4.5 m.

2. CHARTS


The Aircraft Parking/Docking Charts attached to AIRAC AIP SUP contain the following changes to ACFT stands:

- New stand 111 established;
- Stand 301 coordinates and MAX length updated;
- Stands 292 and 293 lead-out lines updated;
- Stand 101 characteristics updated.

APRONS ELEV 33 FT

TWR	118.105	APRON	131.605
GMC	118.805	ATIS	120.180

RIGA
APRON 1, 2, Z3

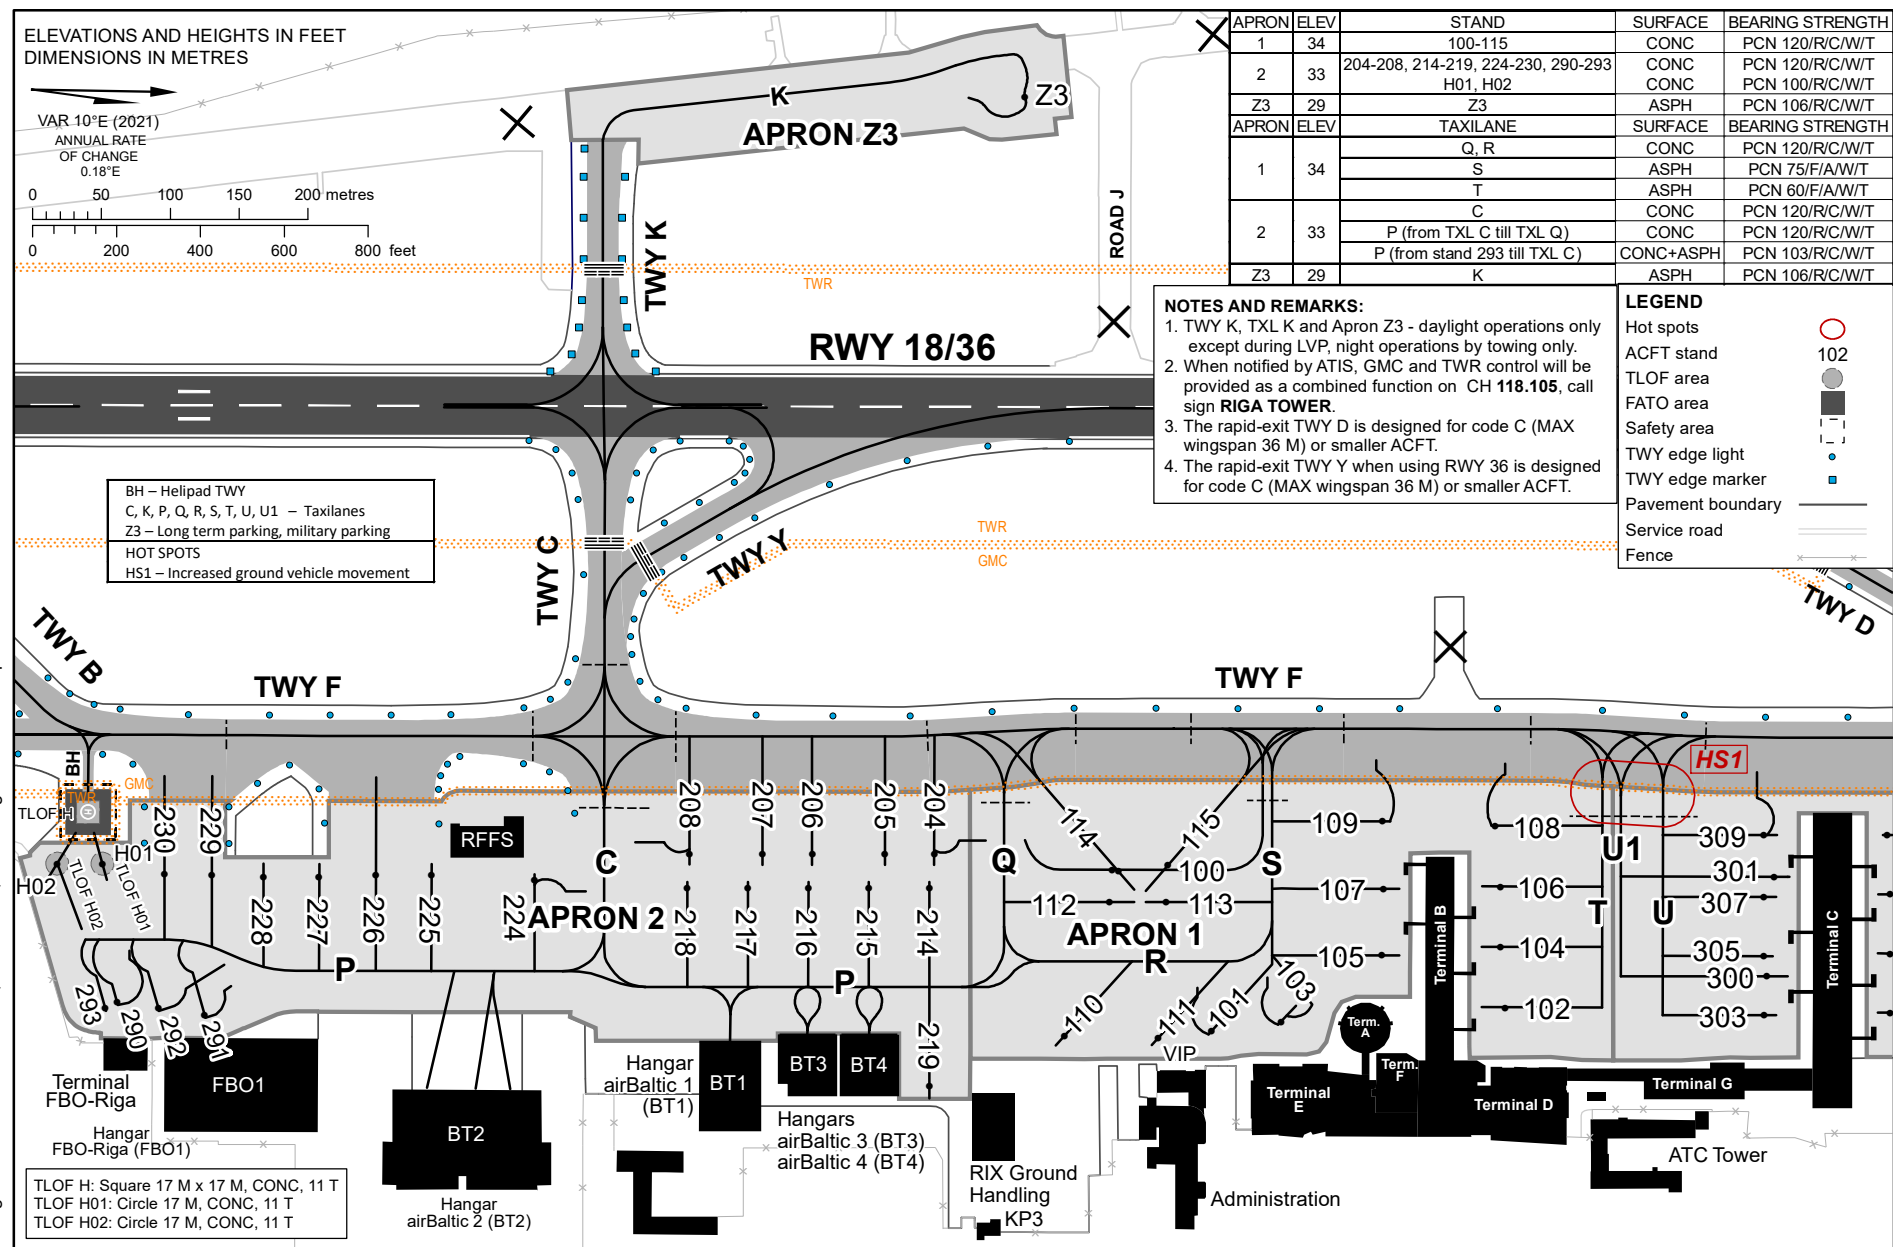

Changes: stand 111 established, stands 101, 301 and guidance lines updated.

RIGA

STAND CHARACTERISTICS

APRON	STAND	STANDARD TAXI ROUTE				COORDINATES		PUSHBACK REQUIRED	MAX WINGSPAN (M)	MAX LENGTH (M)
		ARR 18	DEP 18	ARR 36	DEP 36	LATITUDE	LONGITUDE			
1	100	B-F	Q-F-G	E-F	Q-F-A	56 55 13.10 N	023 58 34.28 E	NO	64.99	75.50
1	101	Y-C-F-S	R-Q-F-G	D-F-S	R-Q-F-A	56 55 15.09 N	023 58 41.56 E	YES/NO	28.50	32.99
1	102	Y-C-F-T	T-F-G	D-F-T	T-F-A	56 55 22.02 N	023 58 41.66 E	YES	35.99	44.51
1	103	Y-C-F-S	S-F-G	D-F-S	S-F-A	56 55 16.74 N	023 58 41.43 E	NO	29.99	32.99
1	104	Y-C-F-T	T-F-G	D-F-T	T-F-A	56 55 22.04 N	023 58 39.05 E	YES	35.99	44.51
1	105	Y-C-F-S	S-F-G	D-F-S	S-F-A	56 55 19.24 N	023 58 38.97 E	YES	35.99	44.51
1	106	Y-C-F-T	T-F-G	D-F-T	T-F-A	56 55 22.16 N	023 58 36.47 E	YES	35.99	44.51
1	107	B-F-S	S-F-G	E-F-S	S-F-A	56 55 19.42 N	023 58 36.12 E	YES	51.99	61.50
1	108	Y-C-F-T	F-G	D-F-T	F-A	56 55 22.16 N	023 58 33.84 E	NO	35.99	44.51
1	109	Y-C-F-S	F-G	D-F-S	F-A	56 55 19.54 N	023 58 33.24 E	NO	35.99	44.51
1	110	Y-C-F-S-R	R-Q-F-G	D-F-S-R	R-Q-F-A	56 55 11.64 N	023 58 41.20 E	YES	35.99	39.50
1	111	Y-C-F-S-R	R-Q-F-G	D-F-S-R	R-Q-F-A	56 55 13.83 N	023 58 41.66 E	YES	35.99	39.50
1	112	Y-C-F-Q	Q-F-G	D-F-Q	Q-F-A	56 55 12.97 N	023 58 35.66 E	YES	35.99	44.51
1	113	Y-C-F-S	S-F-G. R-Q-F-G	D-F-S	S-F-A. R-Q-F-A	56 55 14.31 N	023 58 35.87 E	YES	35.99	44.51
1	114	B-F	F-G	E-F	F-A	56 55 13.24 N	023 58 34.37 E	YES	51.99	61.50
1	115	B-F	F-G	E-F	F-A	56 55 14.42 N	023 58 34.31 E	YES	42.00	48.00
2	204	Y-C-F	Q-F-G	D-F	Q-F-A	56 55 08.97 N	023 58 32.94 E	YES/NO	27.05	36.24
2	205	Y-C-F	F-G	D-F	F-A	56 55 07.81 N	023 58 32.74 E	YES	35.92	39.48
2	206	Y-C-F	F-G	D-F	F-A	56 55 06.11 N	023 58 32.46 E	YES	27.05	36.24
2	207	Y-C-F	F-G	D-F	F-A	56 55 04.94 N	023 58 32.27 E	YES	35.92	39.48
2	208	Y-C-F	C-F-G	D-F	C-F-A	56 55 03.23 N	023 58 31.99 E	YES/NO	35.92	39.48
2	214	Y-C-P	P-Q-F-G	D-F-Q-P	P-Q-F-A	56 55 08.78 N	023 58 34.37 E	YES	35.99	44.51
2	215	Y-C-P	P-Q-F-G	D-F-Q-P	P-Q-F-A	56 55 07.36 N	023 58 34.14 E	YES	35.99	44.51
2	216	Y-C-P	P-C-F-G	D-F-C-P	P-C-F-A	56 55 05.95 N	023 58 33.91 E	YES	35.99	44.51
2	217	Y-C-P	P-C-F-G	D-F-C-P	P-C-F-A	56 55 04.53 N	023 58 33.67 E	YES	35.99	44.51
2	218	Y-C-P	P-C-F-G	D-F-C-P	P-C-F-A	56 55 03.11 N	023 58 33.44 E	YES	35.99	44.51
2	219	Y-C-P	P-Q-F-G	D-F-Q-P	P-Q-F-A	56 55 08.37 N	023 58 42.87 E	YES	35.10	38.71
2	224	Y-C-P	C-F-G	D-F-C-P	C-F-A	56 54 59.55 N	023 58 32.53 E	YES/NO	35.92	39.48
2	225	Y-C-P	P-C-F-G	D-F-C-P	P-C-F-A	56 54 57.15 N	023 58 31.93 E	YES	35.99	44.51
2	226	Y-C-P	F-G	D-F-C-P	F-A	56 54 55.84 N	023 58 31.71 E	NO	35.99	44.51
2	227	Y-C-P	P-C-F-G	D-F-C-P	P-C-F-A	56 54 54.51 N	023 58 31.58 E	YES	35.99	44.51
2	228	Y-C-P	P-C-F-G	D-F-C-P	P-C-F-A	56 54 53.21 N	023 58 31.37 E	YES	35.99	44.51
2	229	Y-C-P	F-G	E-F-C-P	F-A	56 54 52.00 N	023 58 31.09 E	NO	28.91	31.10
2	230	Y-C-P	F-G	E-F-C-P	F-A	56 54 50.89 N	023 58 30.89 E	NO	28.50	29.94
2	290	Y-C-P	P-C-F-G	E-F-C-P	P-C-F-A	56 54 49.52 N	023 58 36.20 E	YES/NO	35.99	44.60
2	291	Y-C-P	P-C-F-G	E-F-C-P	P-C-F-A	56 54 51.54 N	023 58 37.06 E	YES/NO	23.80	28.50
2	292	Y-C-P	P-C-F-G	E-F-C-P	P-C-F-A	56 54 50.47 N	023 58 36.60 E	YES/NO	30.40	30.50
2	293	Y-C-P	P-C-F-G	E-F-C-P	P-C-F-A	56 54 49.23 N	023 58 36.39 E	YES/NO	30.40	30.50
3	300	B-F-U1	U1-F-G	E-F-U1	U1-F-A	56 55 28.21 N	023 58 41.33 E	YES	64.99	75.99
3	301	B-F-U1	U1-F-G	E-F-U1	U1-F-A	56 55 28.59 N	023 58 37.09 E	YES	64.99	75.40
3	302	Y-C-F-V	V-F-G	D-F-V	V-F-A	56 55 31.03 N	023 58 43.35 E	YES	35.99	39.50
3	303	Y-C-F-U	U-F-G	D-F-U	U-F-A	56 55 28.07 N	023 58 42.98 E	YES	35.99	44.51
3	304	Y-C-F-V	V-F-G	D-F-V	V-F-A	56 55 31.15 N	023 58 40.82 E	YES	35.99	44.51
3	305	Y-C-F-U	U-F-G	D-F-U	U-F-A	56 55 28.19 N	023 58 40.45 E	YES	35.99	44.51
3	306	Y-C-F-V	V-F-G	D-F-V	V-F-A	56 55 31.28 N	023 58 38.28 E	YES	35.99	44.51
3	307	Y-C-F-U	U-F-G	D-F-U	U-F-A	56 55 28.31 N	023 58 37.92 E	YES	35.99	45.06
3	308	Y-C-F-V	V-F-G	D-F-V	V-F-A	56 55 31.33 N	023 58 35.73 E	YES	35.99	44.51
3	309	Y-C-F-U	F-G	D-F-U	F-A	56 55 28.44 N	023 58 35.27 E	NO	35.99	44.51
3	311	Y-C-F-V-W	F-G	D-V-W	F-A	56 55 35.63 N	023 58 35.67 E	NO	35.99	38.71
3	312	Y-C-F-V-W	F-G	D-V-W	F-A	56 55 37.13 N	023 58 35.91 E	NO	35.99	38.71
3	313	Y-C-F-V-W	F-G	D-V-W	F-A	56 55 38.51 N	023 58 36.14 E	NO	35.99	38.71
3	314	Y-C-F-V-W	F-G	D-V-W	F-A	56 55 39.90 N	023 58 36.37 E	NO	35.99	38.71
3	315	Y-C-F-V-W	F-G	D-V-W	F-A	56 55 41.39 N	023 58 36.61 E	NO	35.99	38.71
3	316	Y-C-F-V-W	F-G	D-V-W	F-A	56 55 42.78 N	023 58 36.84 E	NO	35.99	38.71
3	317	Y-C-F-V-W	F-G	D-V-W	F-A	56 55 44.16 N	023 58 37.06 E	NO	31.99	35.53
3	321	Y-C-F-V-W	W-E-F-G	D-V-W	W-E-F-A	56 55 35.23 N	023 58 43.88 E	YES	35.99	45.06
3	322	Y-C-F-V-W	W-E-F-G	D-V-W	W-E-F-A	56 55 36.64 N	023 58 44.11 E	YES	35.99	45.06
3	323	Y-C-F-V-W	W-E-F-G	D-V-W	W-E-F-A	56 55 38.06 N	023 58 44.34 E	YES	35.99	45.06
3	324	Y-C-F-V-W	W-E-F-G	D-V-W	W-E-F-A	56 55 39.48 N	023 58 44.57 E	YES	35.99	45.06
3	325	Y-C-F-V-W	W-E-F-G	D-V-W	W-E-F-A	56 55 40.90 N	023 58 44.81 E	YES	35.99	45.06
3	326	Y-C-F-V-W	W-E-F-G	D-V-W	W-E-F-A	56 55 42.33 N	023 58 44.78 E	YES	35.99	44.51
3	327	Y-C-F-V-W	W-E-F-G	D-V-W	W-E-F-A	56 55 43.74 N	023 58 45.03 E	YES	33.99	40.74
4	401	B-F-E-E1	E1-E-F-G	E-E1	E1-E-F-A	56 55 44.27 N	023 59 01.24 E	YES	42.00	55.00
4	402	B-F-E-E1	E1-E-F-G	E-E1	E1-E-F-A	56 55 47.26 N	023 59 01.74 E	YES	42.00	55.00
4	461	Y-C-F-E-E1	E1-E-F-G	E-E1	E1-E-F-A	56 55 42.91 N	023 58 52.85 E	YES	23.99	30.30
4	462	Y-C-F-E-E1	E1-E-F-G	E-E1	E1-E-F-A	56 55 43.05 N	023 58 51.04 E	YES	28.65	30.30
4	467	Y-C-F-E-E1	E1-E-F-G	E-E1	E1-E-F-A	56 55 44.56 N	023 59 01.34 E	YES	35.99	45.06
4	468	Y-C-F-E-E1	E1-E-F-G	E-E1	E1-E-F-A	56 55 45.91 N	023 59 01.56 E	YES	35.99	45.06
4	469	Y-C-F-E-E1	E1-E-F-G	E-E1	E1-E-F-A	56 55 47.34 N	023 59 01.78 E	YES	35.99	45.06
4	470	Y-C-F-E-E1	E1-E-F-G	E-E1	E1-E-F-A	56 55 48.69 N	023 59 02.00 E	YES	35.99	45.06
4	471	Y-C-F-E-E1	E1-E-F-G	E-E1	E1-E-F-A	56 55 51.24 N	023 58 58.02 E	YES/NO	20.00	20.91
4	472	Y-C-F-E-E1	E1-E-F-G	E-E1	E1-E-F-A	56 55 52.17 N	023 58 58.17 E	YES/NO	23.93	20.91
4	473	Y-C-F-E-E1	E1-E-F-G	E-E1	E1-E-F-A	56 55 53.11 N	023 58 58.33 E	YES/NO	22.00	20.91
4	474	Y-C-F-E-E1	E1-E-F-G	E-E1	E1-E-F-A	56 55 54.03 N	023 58 58.49 E	YES/NO	22.00	20.91
4	475	Y-C-F-E-E1	E1-E-F-G	E-E1	E1-E-F-A	56 55 50.07 N	023 59 02.82 E	YES/NO	22.00	29.87
4	476	Y-C-F-E-E1	E1-E-F-G	E-E1	E1-E-F-A	56 55 51.00 N	023 59 02.97 E	YES/NO	23.93	32.51
4	477	Y-C-F-E-E1	E1-E-F-G	E-E1	E1-E-F-A	56 55 51.94 N	023 59 03.13 E	YES/NO	22.75	29.87
4	478	Y-C-F-E-E1	E1-E-F-G	E-E1	E1-E-F-A	56 55 52.87 N	023 59 03.28 E	YES/NO	23.25	32.51
4	479	Y-C-F-E-E1	E1-E-F-G	E-E1	E1-E-F-A	56 55 53.79 N	023 59 03.44 E	YES/NO	22.00	29.87
5	501	B-F-E	E-F-G	E	E-F-A	56 55 49.62 N	023 58 40.19 E	YES	73.30	76.26
5	502	B-F-E	E-F-G	E	E-F-A	56 55 49.23 N	023 58 45.02 E	YES	68.40	76.26
5	503	B-F-E	E-F-G	E	E-F-A	56 55 49.00 N	023 58 49.64 E	YES	68.40	76.26
5	511	Y-C-F-E	E-F-G	D-F-E	E-F-A	56 55 49.44 N	023 58 38.88 E	YES	35.99	44.51
5	512	Y-C-F-E	E-F-G	D-F-E	E-F-A	56 55 49.32 N	023 58 41.42 E	YES	35.99	44.51
23	23	K	K-C-F-G	E-F-C-K	K-C-F-A	56 55 12.66 N	023 58 00.87 E	NO	42.36	45.09

For helicopter stands see
EVRA AD 2.24.2.4

AIRCRAFT PARKING/
DOCKING CHART – ICAO

APRONS ELEV 33 FT

TWR	118.105	APRON	131.605
GMC	118.805	ATIS	120.180


RIGA
APRON 3, 4, 5ELEVATIONS AND HEIGHTS IN FEET
DIMENSIONS IN METRES

NOTES AND REMARKS:

- When notified by ATIS, GMC and TWR control will be provided as a combined function on CH 118.105, call sign **RIGA TOWER**.
- The rapid-exit TWY D is designed for code C (MAX wingspan 36 M) or smaller ACFT.

LEGEND

Hot spots	102
ACFT stand	102
TLOF area	
TWY edge light	
TWY edge marker	
Pavement boundary	
Service road	
Fence	

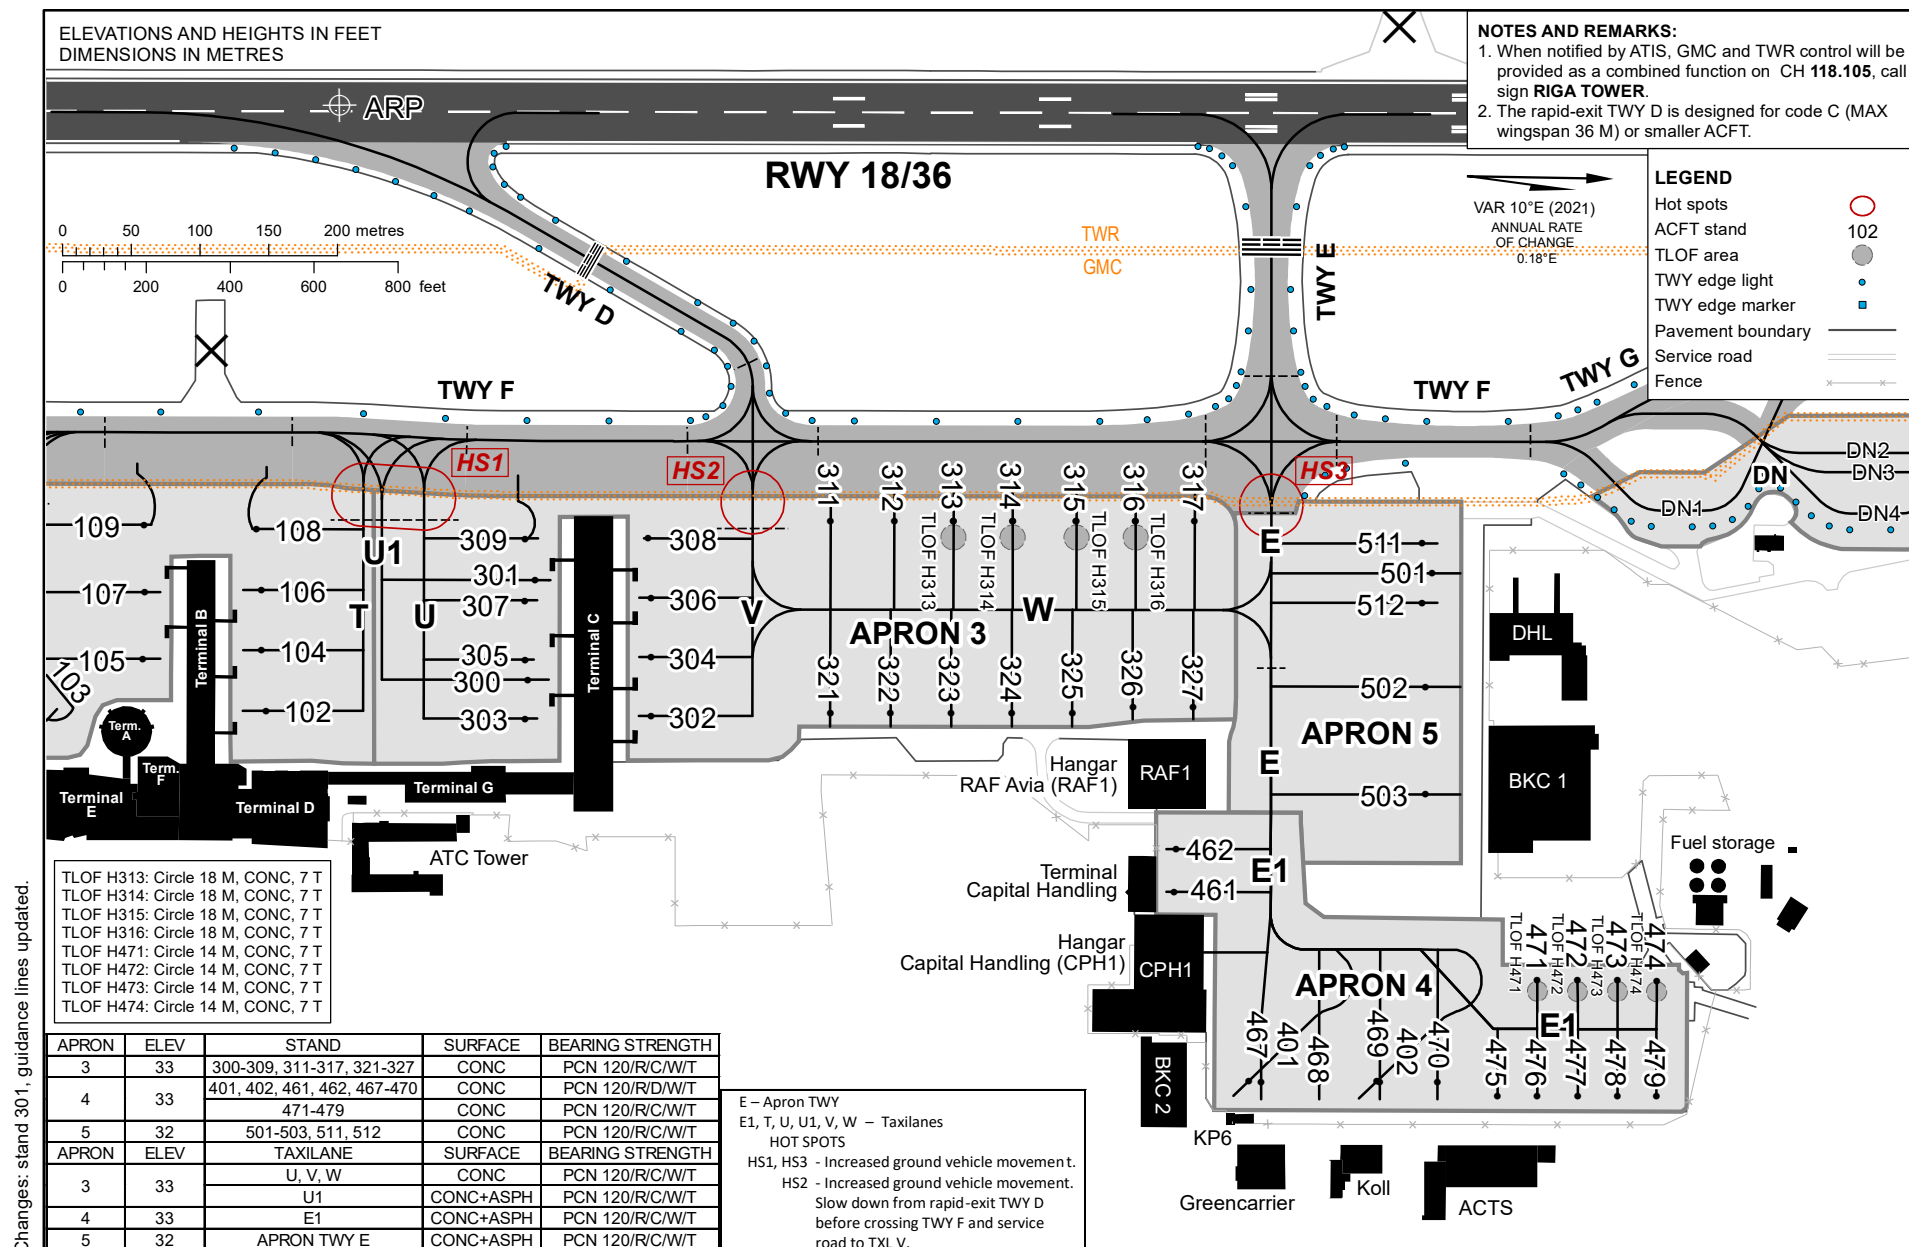VAR 10°E (2021)
ANNUAL RATE
OF CHANGE
0.18°E

RIGA

HELICOPTER STAND CHARACTERISTICS

APRON	STAND	STANDARD TAXI ROUTES						COORDINATES		MAX D-VALUE FOR AIR TAXI (M)	MAX ROTOR WIDTH FOR GROUND TAXI (M)
		ARR FATO	DEP FATO	ARR RWY 18	DEP RWY 18	ARR RWY 36	DEP RWY 36	LATITUDE	LONGITUDE		
2	H01	H01	H01	B-BH-FATO	FATO-BH-B	B-BH-FATO	FATO-BH-B	56 54 49.46 N	023 58 30.20 E	20.00	16.36
2	H02	H02	H02	B-BH-FATO	FATO-BH-B	B-BH-FATO	FATO-BH-B	56 54 48.40 N	023 58 30.03 E	20.00	16.36
3	TLOF H313	-	-	E-W	F-E	E-W	F-E	56 55 38.48 N	023 58 36.84 E	17.46	24.08
3	TLOF H314	-	-	E-W	F-E	E-W	F-E	56 55 39.86 N	023 58 37.07 E	17.46	24.08
3	TLOF H315	-	-	E-W	F-E	E-W	F-E	56 55 41.36 N	023 58 37.31 E	17.46	24.08
3	TLOF H316	-	-	E-W	F-E	E-W	F-E	56 55 42.75 N	023 58 37.54 E	17.46	24.08
4	TLOF H471	BH-F-E-E1	E1-E-F-BH	E-E1	E1-E	E-E1	E1-E	56 55 51.22 N	023 58 58.50 E	17.46	14.69
4	TLOF H472	BH-F-E-E1	E1-E-F-BH	E-E1	E1-E	E-E1	E1-E	56 55 52.15N	023 58 58.66 E	17.46	14.69
4	TLOF H473	BH-F-E-E1	E1-E-F-BH	E-E1	E1-E	E-E1	E1-E	56 55 53.09 N	023 58 58.81 E	17.46	14.69
4	TLOF H474	BH-F-E-E1	E1-E-F-BH	E-E1	E1-E	E-E1	E1-E	56 55 54.01 N	023 58 58.96 E	17.46	14.69